US012177542B2

(12) **United States Patent**
Doig-Cardet et al.

(10) **Patent No.: US 12,177,542 B2**
(45) **Date of Patent: *Dec. 24, 2024**

(54) **METHODS AND SYSTEMS FOR PROVIDING DYNAMICALLY COMPOSED PERSONALIZED MEDIA ASSETS**

(71) Applicant: **Netflix, Inc.**, Los Gatos, CA (US)

(72) Inventors: **Christine Doig-Cardet**, Los Gatos, CA (US); **Bruce Wobbe**, San Jose, CA (US); **Sanford Holsapple**, Sherman Oaks, CA (US); **Alexander Lott**, Tustin, CA (US); **Sonali Sharma**, Los Gatos, CA (US); **Clay Gimenez**, Campbell, CA (US); **Jeremy Kelly**, Los Gatos, CA (US); **Jeff Kirchner**, Woodland Hills, CA (US); **Leena Janardanan**, Santa Clara, CA (US)

(73) Assignee: **Netflix, Inc.**, Los Gatos, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/515,106**

(22) Filed: **Nov. 20, 2023**

(65) **Prior Publication Data**

US 2024/0089565 A1 Mar. 14, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/810,259, filed on Jun. 30, 2022, now Pat. No. 11,871,095, and a (Continued)

(51) **Int. Cl.**
H04N 21/8549 (2011.01)
H04N 21/234 (2011.01)
(Continued)

(52) **U.S. Cl.**
CPC ... ***H04N 21/8549*** (2013.01); ***H04N 21/23424*** (2013.01); ***H04N 21/25891*** (2013.01);
(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,356,456 B2 7/2019 Ranjeet
10,455,297 B1 10/2019 Mahyar
(Continued)

FOREIGN PATENT DOCUMENTS

BR 112023017747-2 A2 3/2022
EP 1919216 A1 5/2008
WO 2022187268 A1 9/2022

OTHER PUBLICATIONS

U.S. Appl. No. 17/190,350, A, Doig-Cardet Christine.
(Continued)

Primary Examiner — James R Marandi
(74) *Attorney, Agent, or Firm* — Greenberg Traurig, LLP

(57) **ABSTRACT**

The disclosed computer-implemented method may include accessing a media item that includes multiple media item segments that are to be played back in a specific manner. The method may also include generating playgraphs for the media item, where the playgraphs define different playback paths between media item segments. The method may next include selecting a specific playgraph from the generated playgraphs, and then providing the selected playgraph to a playback device. Playback of the media item according to the selected playgraph may thereby provide a customized presentation of the media item. Various other methods, systems, and computer-readable media are also disclosed.

20 Claims, 10 Drawing Sheets



Related U.S. Application Data

continuation of application No. 17/190,350, filed on Mar. 2, 2021, now Pat. No. 11,956,520.

(51) **Int. Cl.**

H04N 21/258	(2011.01)
H04N 21/262	(2011.01)
H04N 21/2668	(2011.01)
H04N 21/845	(2011.01)

(52) **U.S. Cl.**

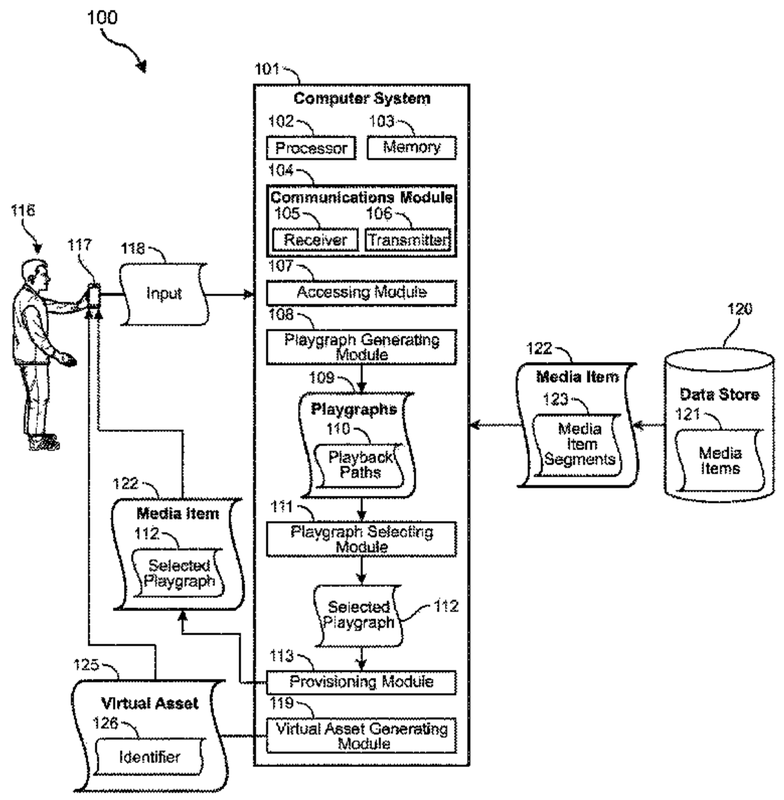CPC ... ***H04N 21/26258*** (2013.01); ***H04N 21/2668*** (2013.01); ***H04N 21/8456*** (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,555,023	B1	2/2020	McCarthy
2006/0253782	A1	11/2006	Stark
2008/0251575	A1	10/2008	Bowling
2011/0307924	A1	12/2011	Roberts
2012/0163770	A1	6/2012	Kaiser
2014/0222972	A1	8/2014	Thomas
2014/0278969	A1	9/2014	Newell
2015/0172787	A1	6/2015	Geramifard
2015/0294685	A1	10/2015	Bloch
2017/0366780	A1	12/2017	Jehan
2018/0294013	A1	10/2018	Eppolito

OTHER PUBLICATIONS

Final Office Action received for U.S. Appl. No. 17/190,350 mailed Dec. 22, 2021.

International Preliminary Report on Patentability received for International Application Serial No. PCT/US2022/018375 mailed Aug. 29, 2023.

International Search Report and Written Opinion received for International Application Serial No. PCT/US2022/018375 mailed Jun. 2, 2022.

Non-Final Office Action received for U.S. Appl. No. 17/190,350 mailed Jun. 24, 2021.

Non-Final Office Action received for U.S. Appl. No. 17/810,259 mailed May 25, 2023.

Notice of Allowance received for U.S. Appl. No. 17/190,350 mailed Jul. 26, 2022.

Notice of Allowance received for U.S. Appl. No. 17/190,350 mailed Mar. 25, 2022.

Notice of Allowance received for U.S. Appl. No. 17/190,350 mailed Sep. 22, 2022.

Notice of Allowance received for U.S. Appl. No. 17/810,259 mailed Sep. 27, 2023.

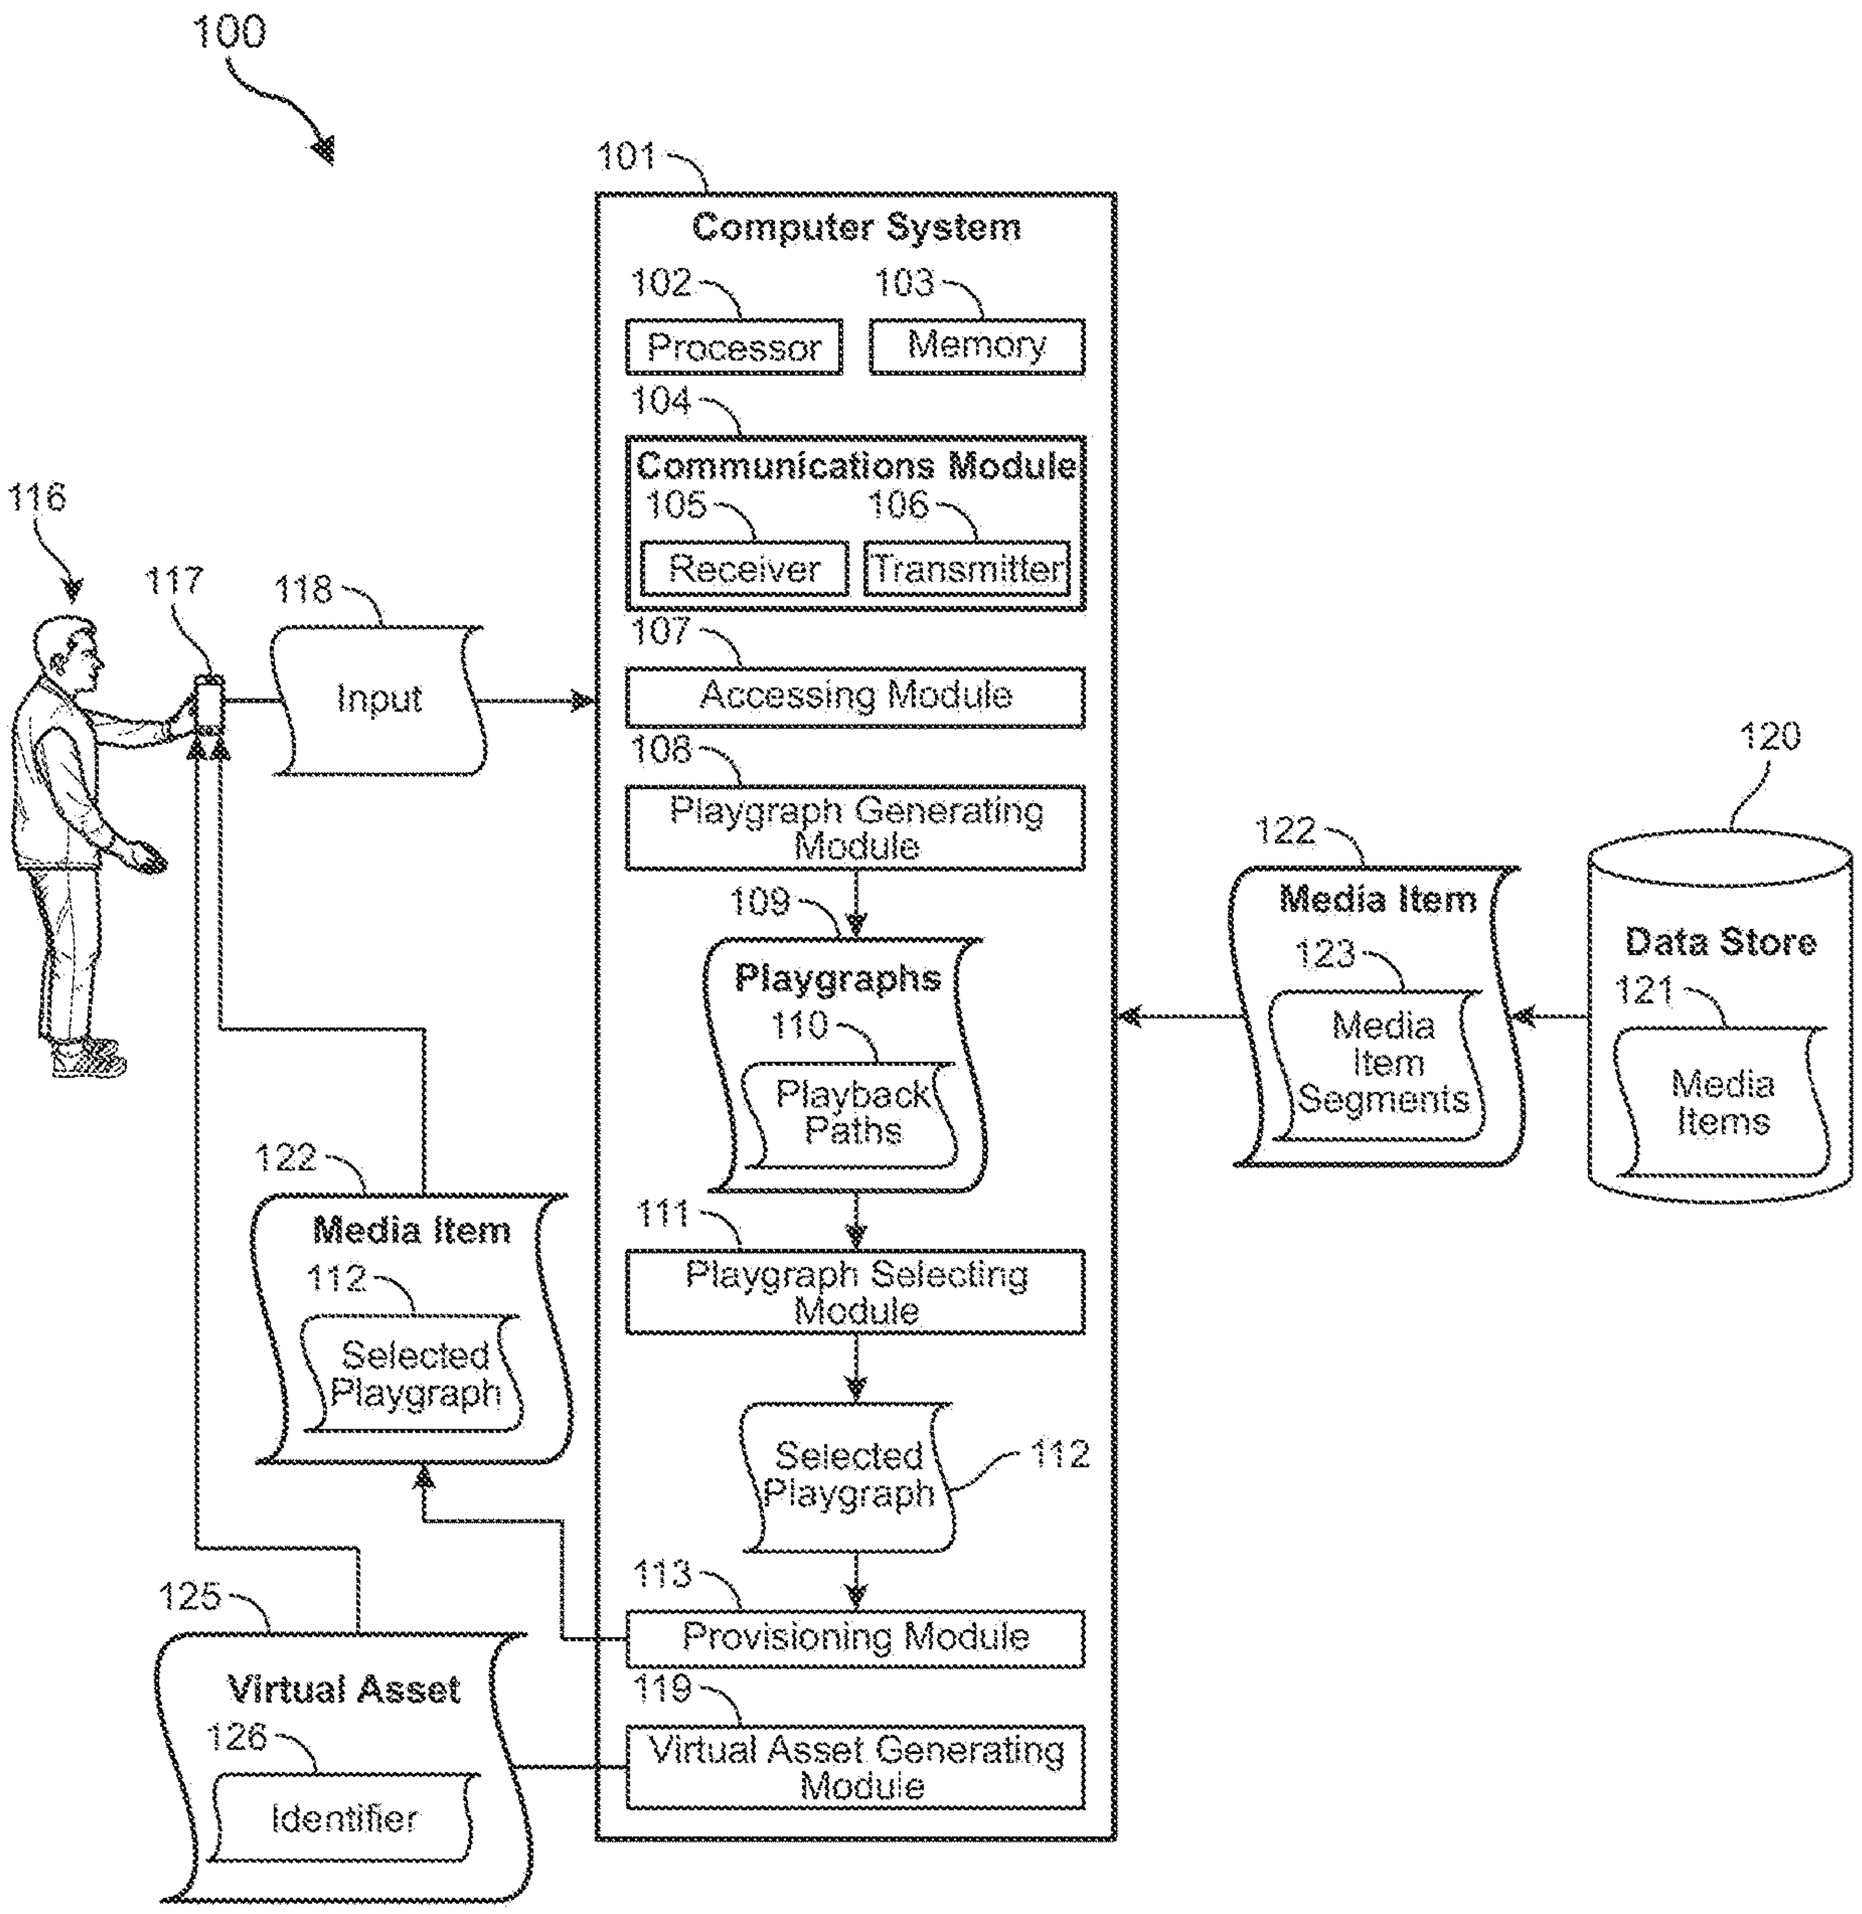
100
101
Computer System
102
Processor
103
Memory
104
Communications Module
105
Receiver
106
Transmitter
107
Accessing Module
108
Playgraph Generating Module
109
Playgraphs
110
Playback Paths
111
Playgraph Selecting Module
Selected Playgraph
112
113
Provisioning Module
119
Virtual Asset Generating Module
116
117
118
Input
120
Data Store
121
Media Items
122
Media Item
123
Media Item Segments
122
Media Item
112
Selected Playgraph
125
Virtual Asset
126
Identifier

FIG. 1

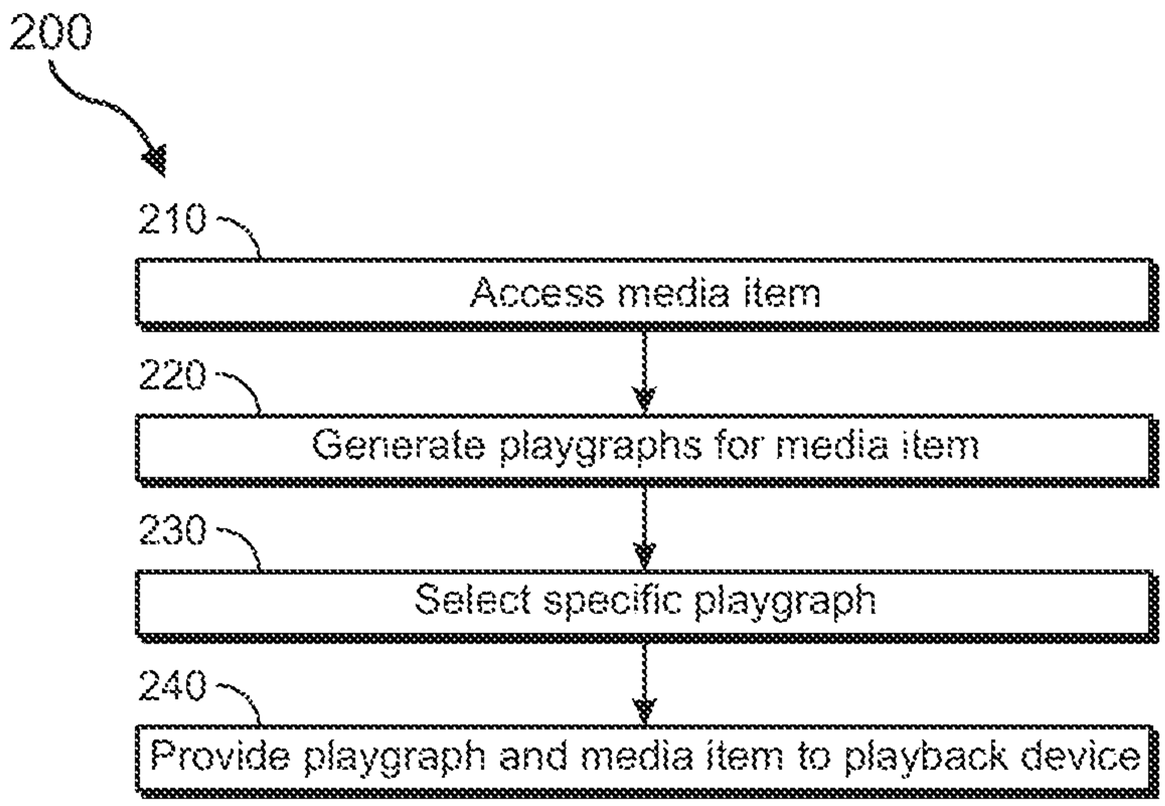
200
210
Access media item
220
Generate playgraphs for media item
230
Select specific playgraph
240
Provide playgraph and media item to playback device

FIG. 2

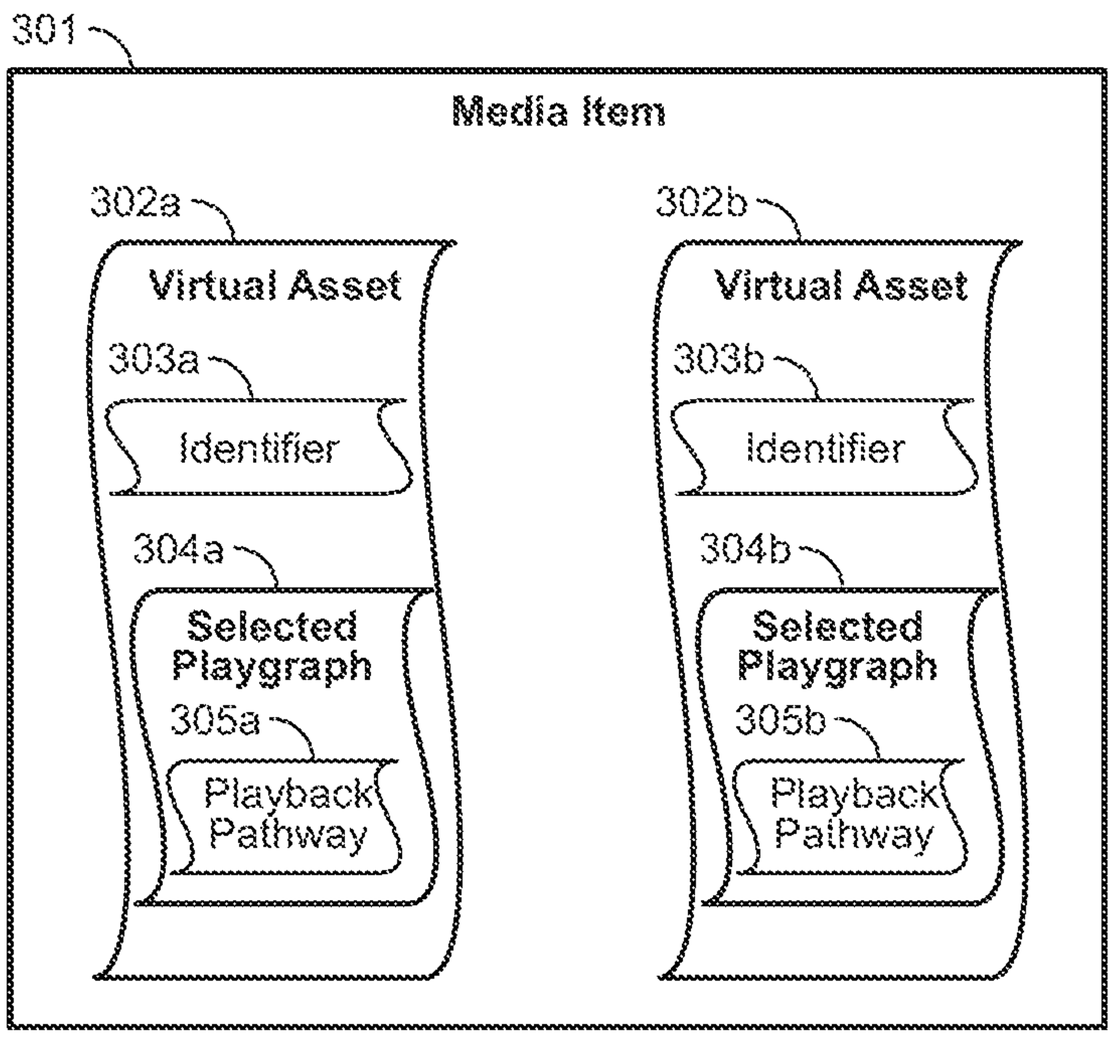
301
Media Item
302a
Virtual Asset
303a
Identifier
304a
Selected Playgraph
305a
Playback Pathway
302b
Virtual Asset
303b
Identifier
304b
Selected Playgraph
305b
Playback Pathway

FIG. 3

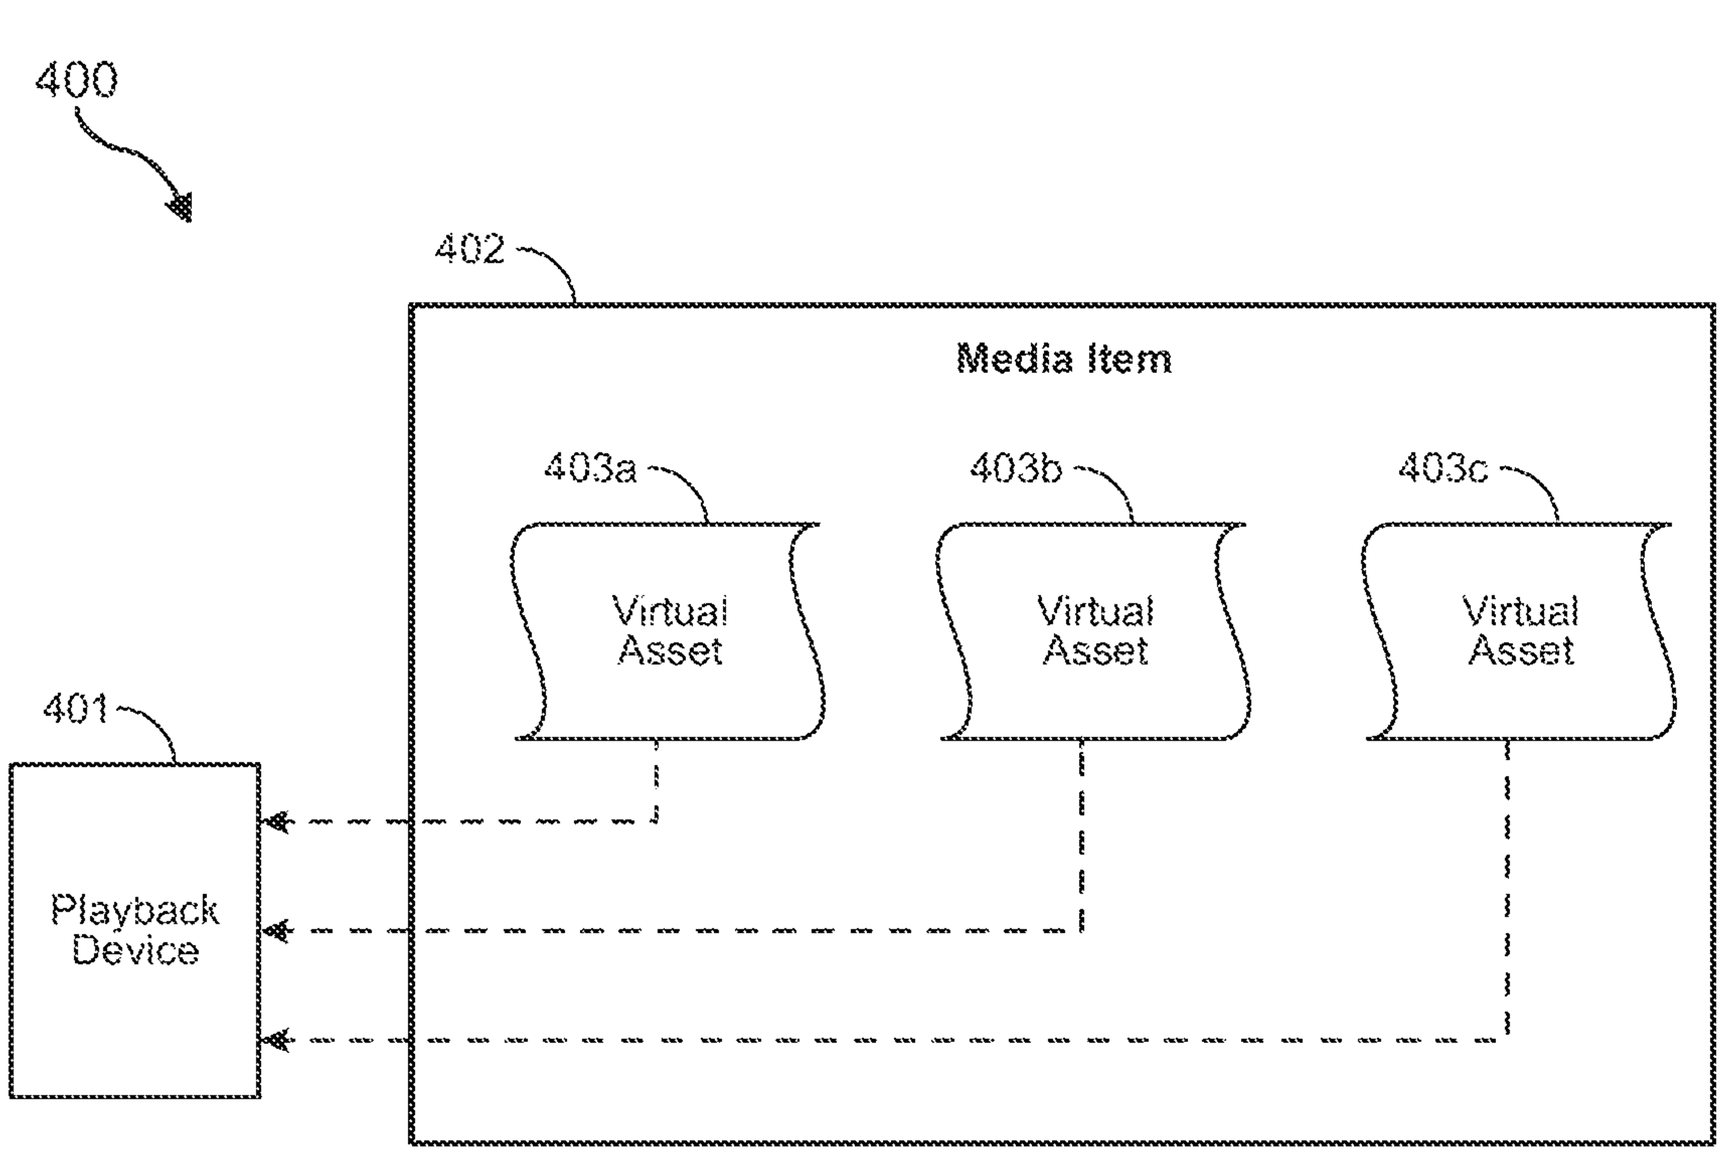
400
402
Media Item
403a
Virtual Asset
403b
Virtual Asset
403c
Virtual Asset
401
Playback Device

FIG. 4

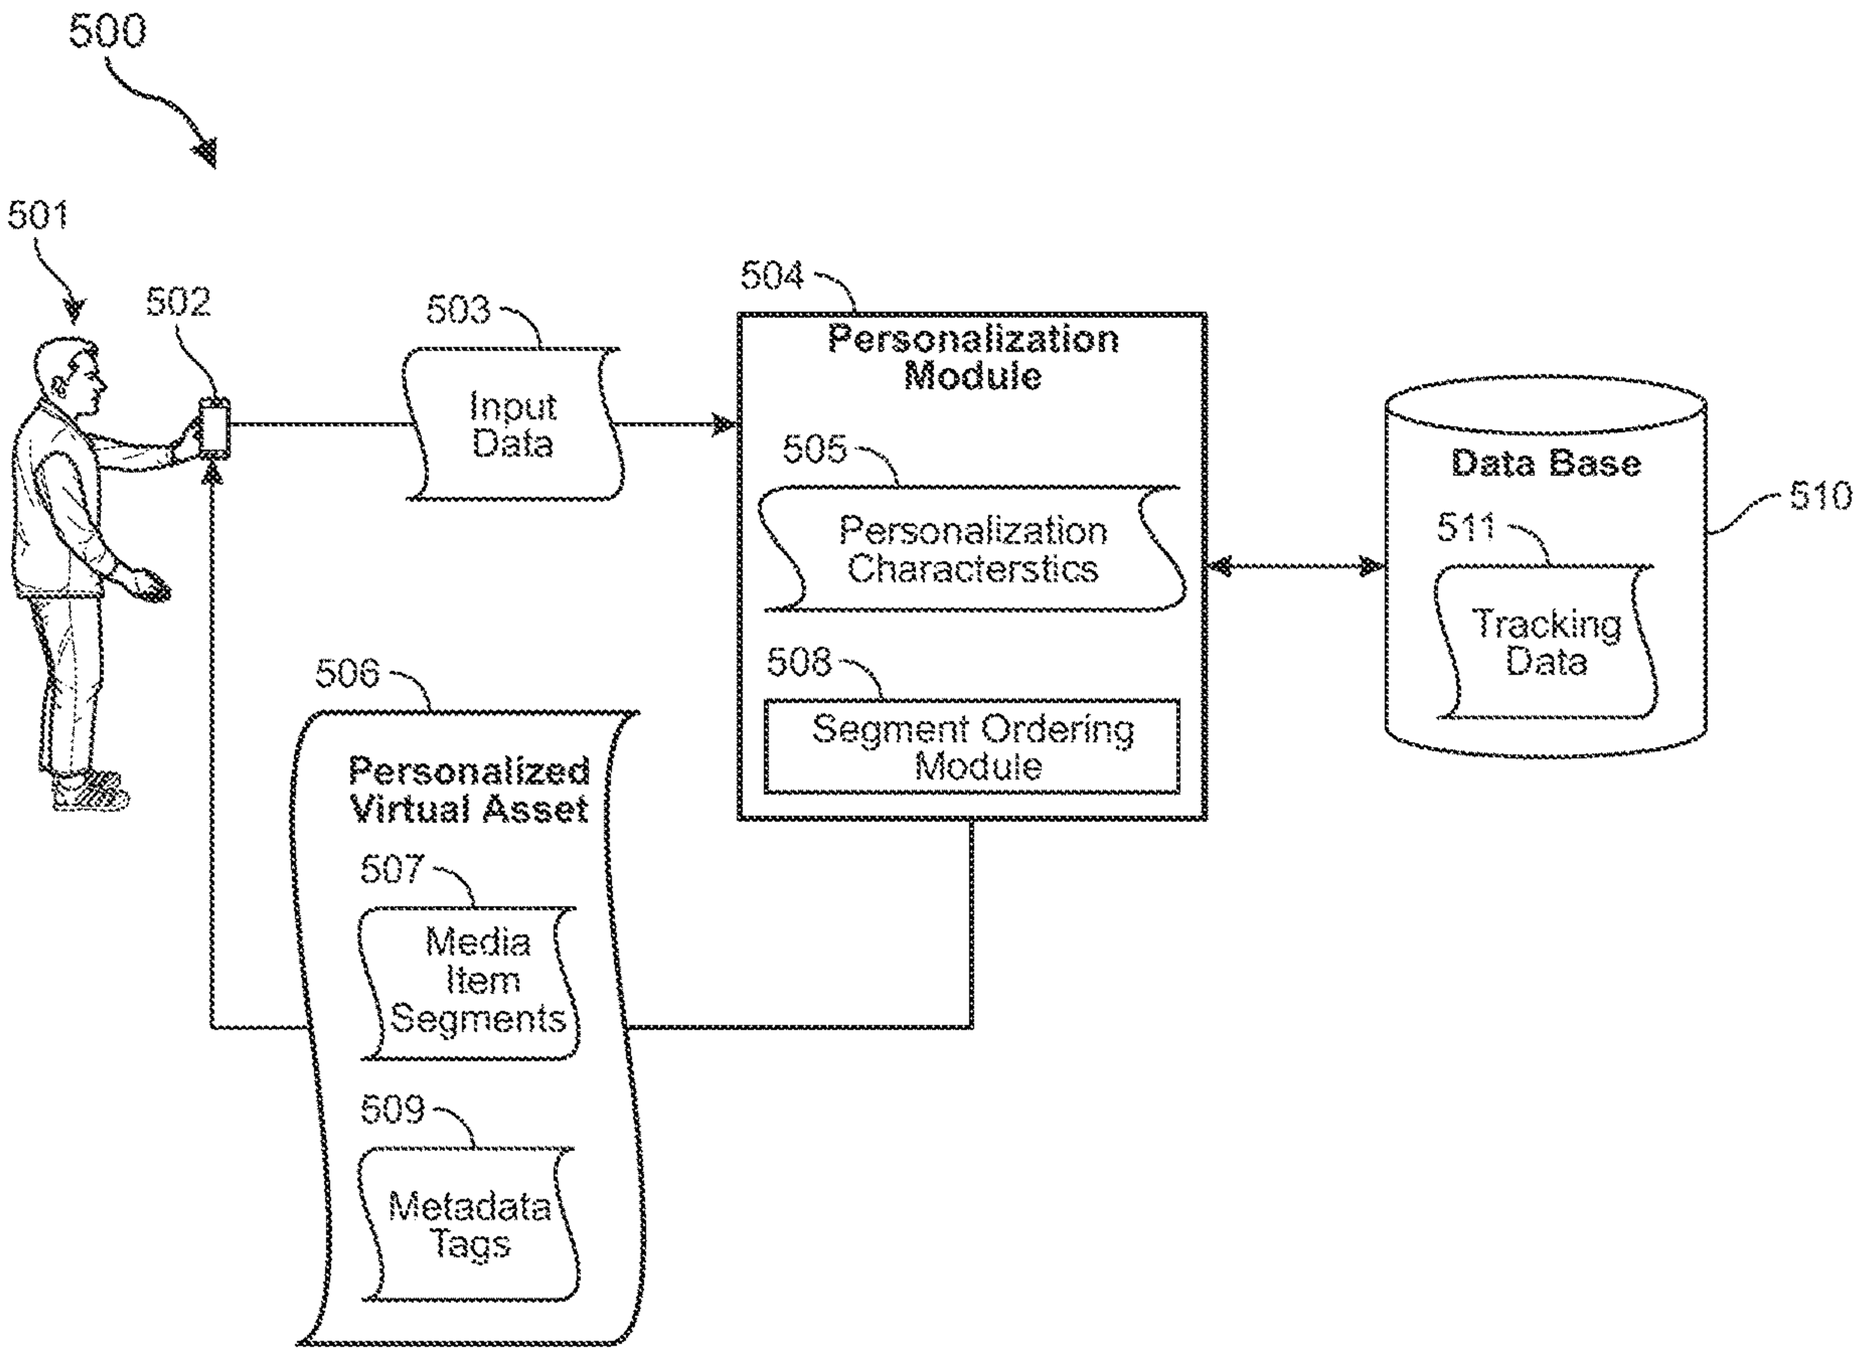
500
501
502
503
Input Data
504
Personalization Module
505
Personalization Characterstics
508
Segment Ordering Module
Data Base
510
511
Tracking Data
506
Personalized Virtual Asset
507
Media Item Segments
509
Metadata Tags

FIG. 5

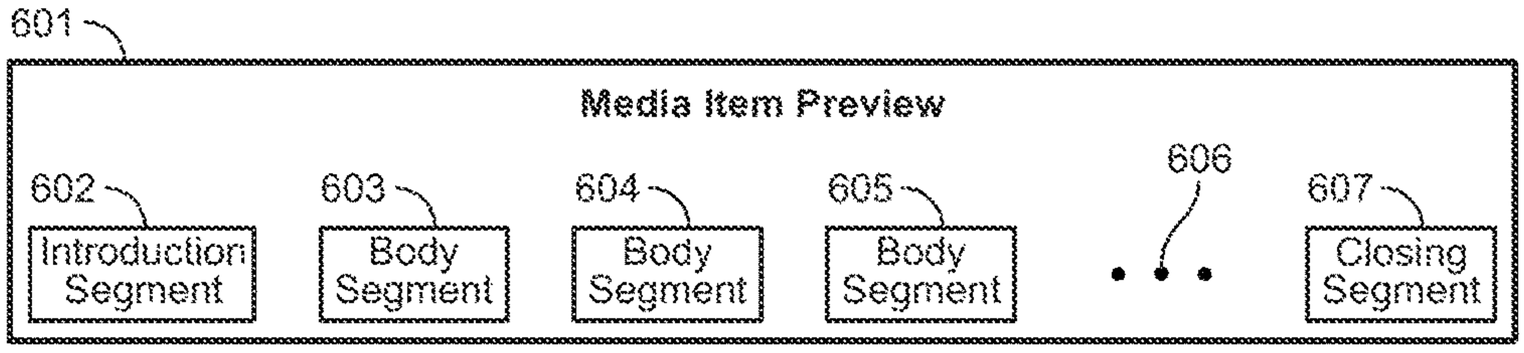
601
Media Item Preview
602
Introduction Segment
603
Body Segment
604
Body Segment
605
Body Segment
606
607
Closing Segment

FIG. 6

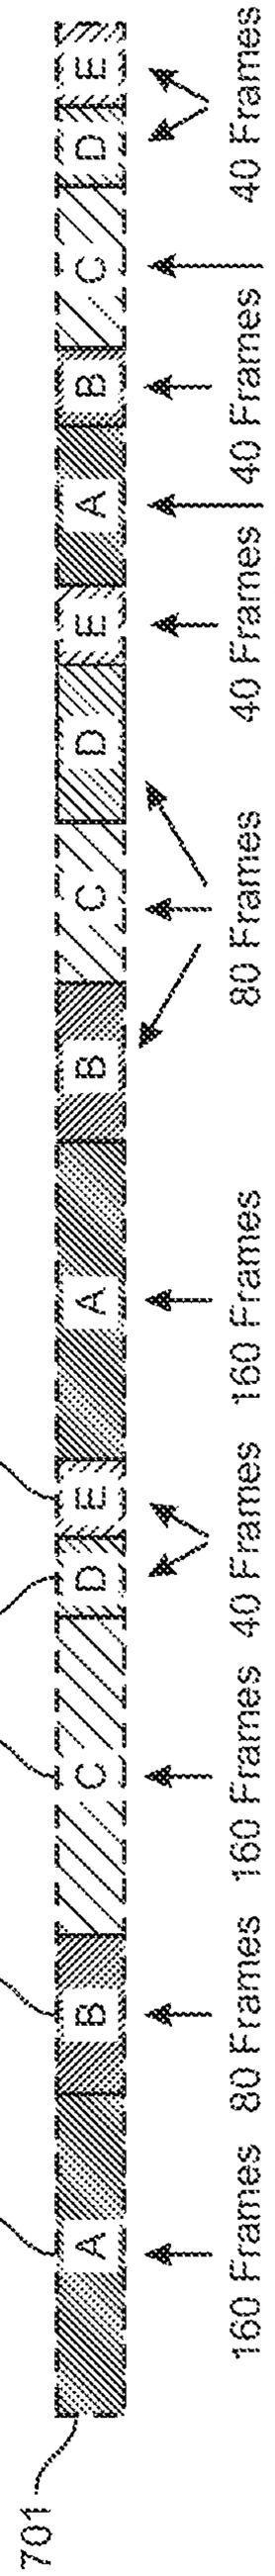
701
702
703
704
705
706
A
B
C
D
E
160 Frames
80 Frames
40 Frames

FIG. 7

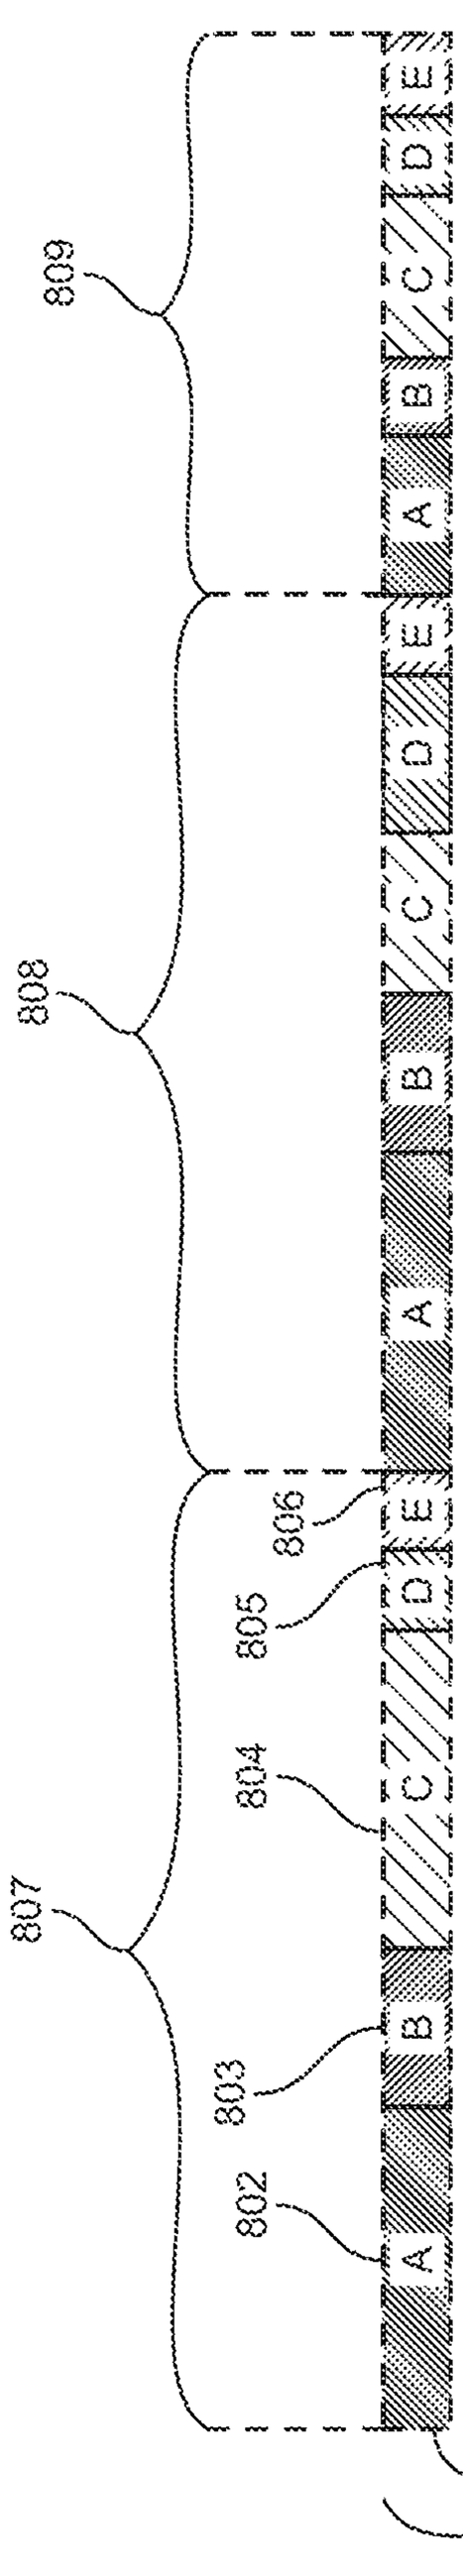
801
802
803
804
805
806
807
808
809
810
A
B
C
D
E
Title A -
160 Frame
Title B -
80 Frame
Title C -
80 Frame
Title D -
40 Frame
Title E -
40 Frame

FIG. 8

First Clip		Second Clip		Third Clip		Total Frames	Suggested Ranking
A	160	+ 160	+	80	=	400	PVR #1
B	80	+ 80	+	40	=	200	PVR #3
C	160	+ 80	+	80	=	320	PVR #2
D	40	+ 80	+	40	=	160	PVR #4
E	40	+ 40	+	40	=	120	PVR #5

FIG. 9

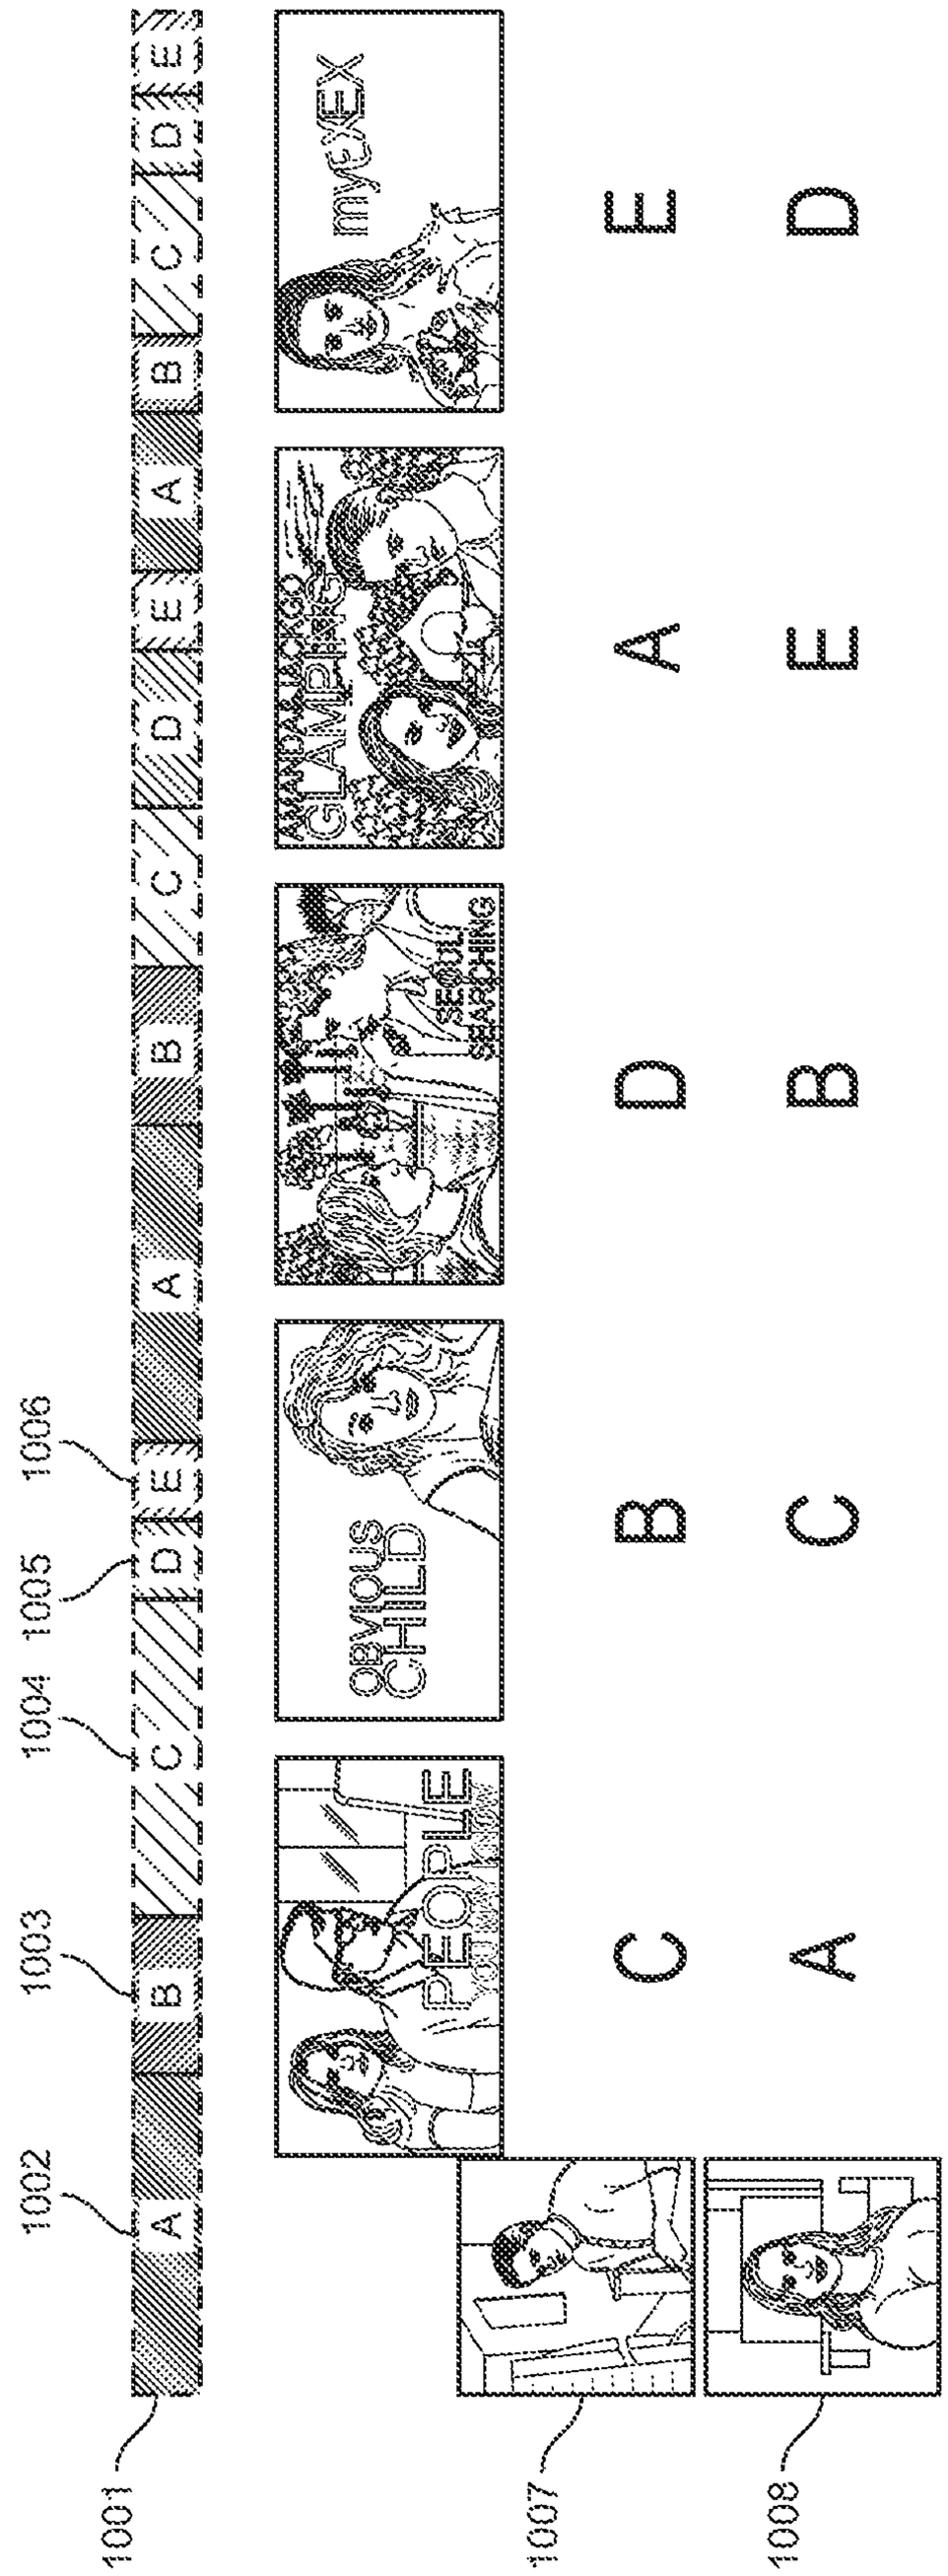
1001
1002
1003
1004
1005
1006
1007
1008
A
B
C
D
E
myEXEX
OBVIOUS CHILD
SEOUL SEARCHING
PEOPLE

FIG. 10

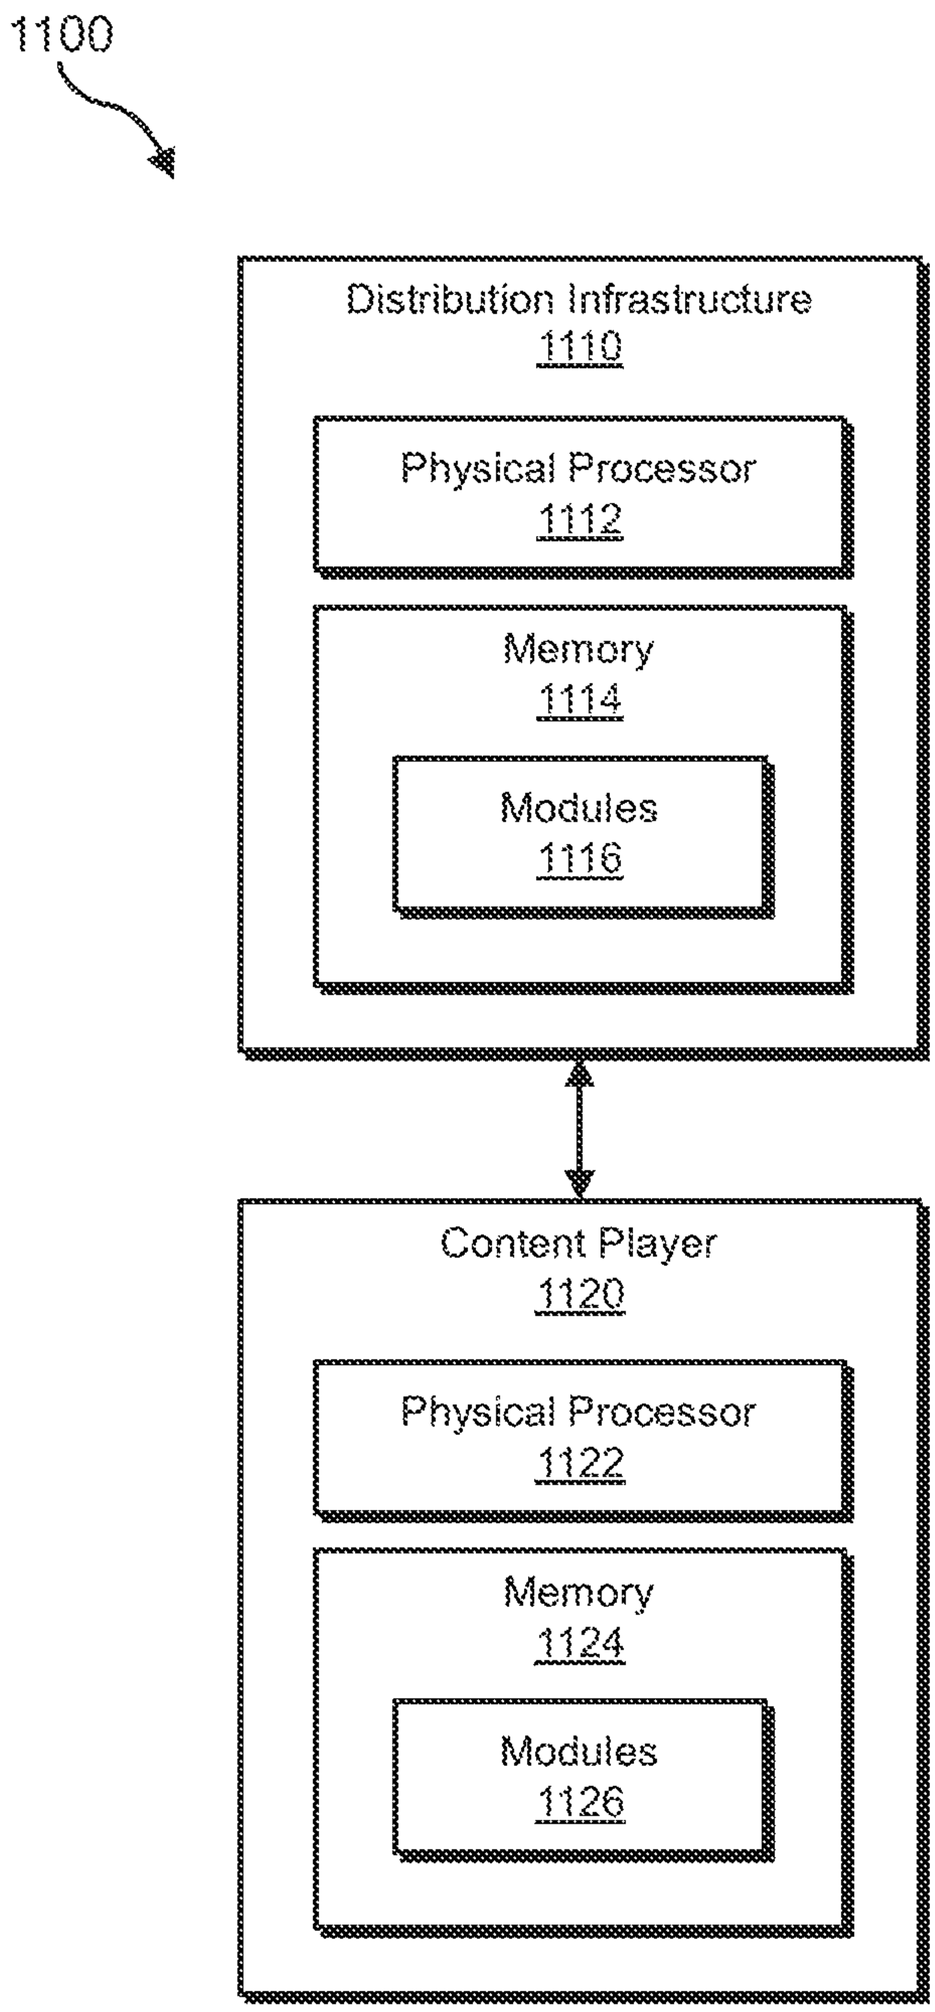
1100
Distribution Infrastructure
1110
Physical Processor
1112
Memory
1114
Modules
1116
Content Player
1120
Physical Processor
1122
Memory
1124
Modules
1126

FIG. 11

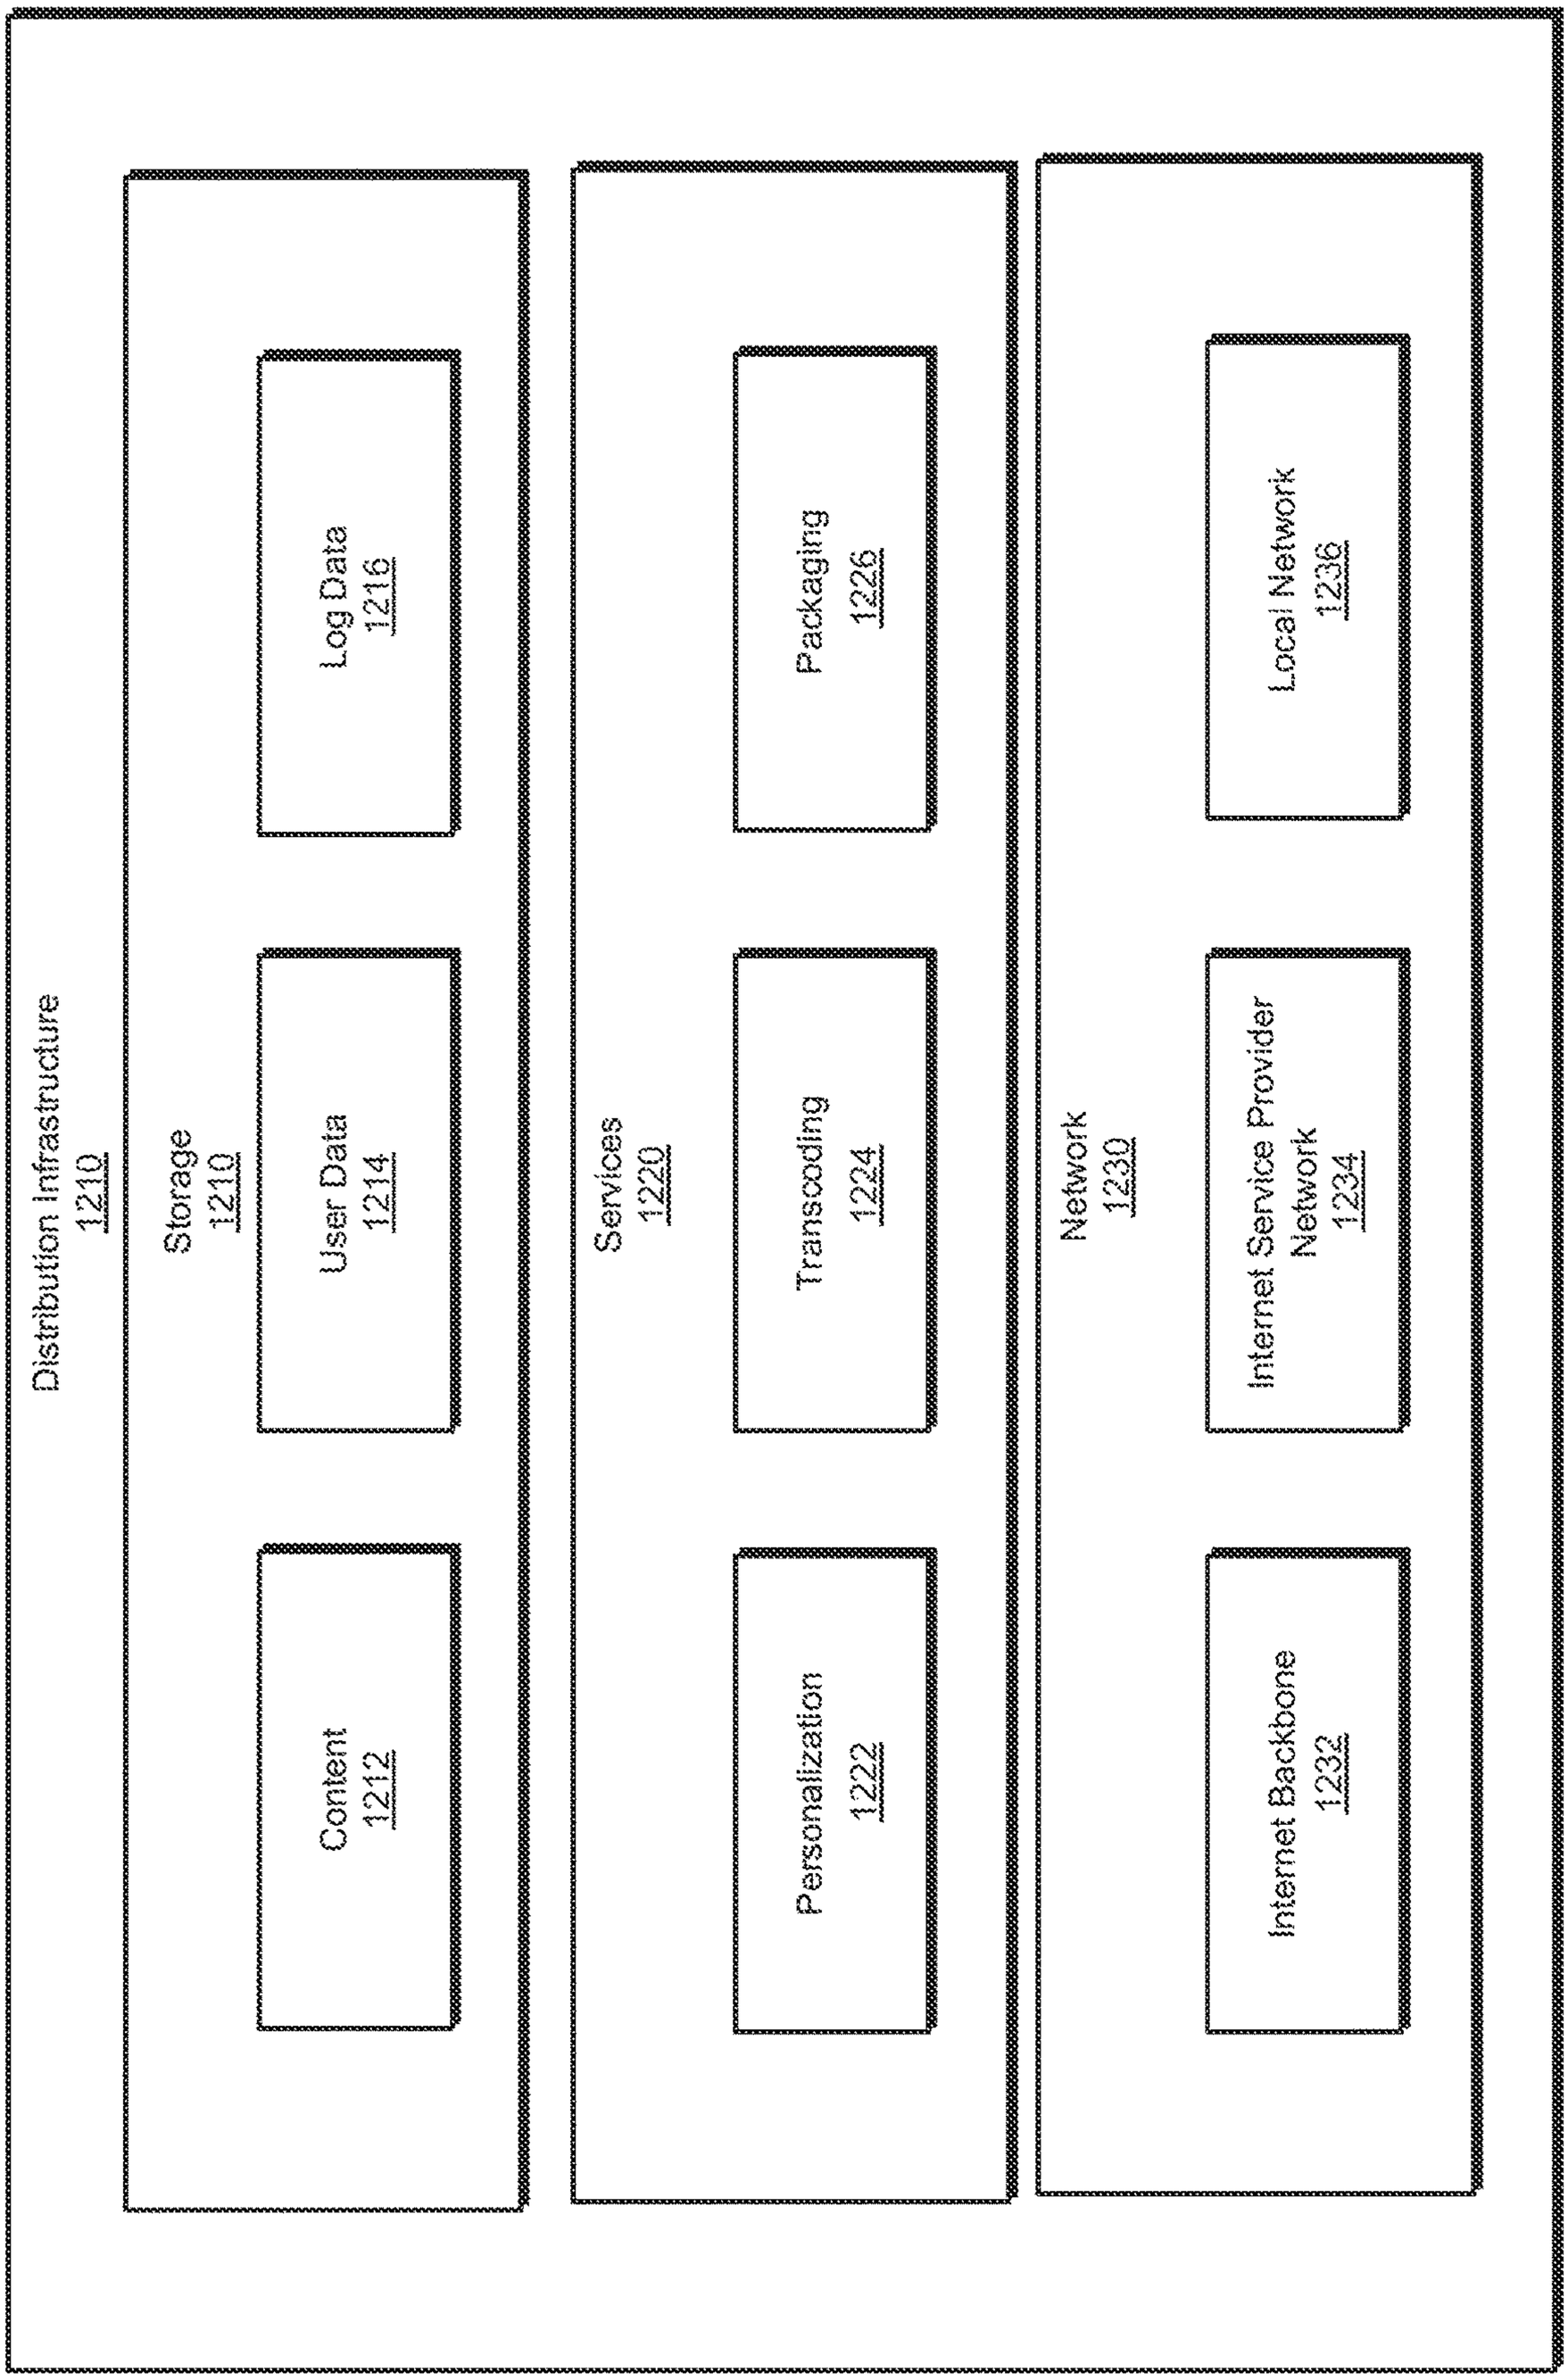
Distribution Infrastructure
1210
Content
1212
Log Data
1216
Storage
1210
User Data
1214
Personalization
1222
Packaging
1226
Services
1220
Transcoding
1224
Internet Backbone
1232
Local Network
1236
Network
1230
Internet Service Provider
Network
1234

FIG. 12

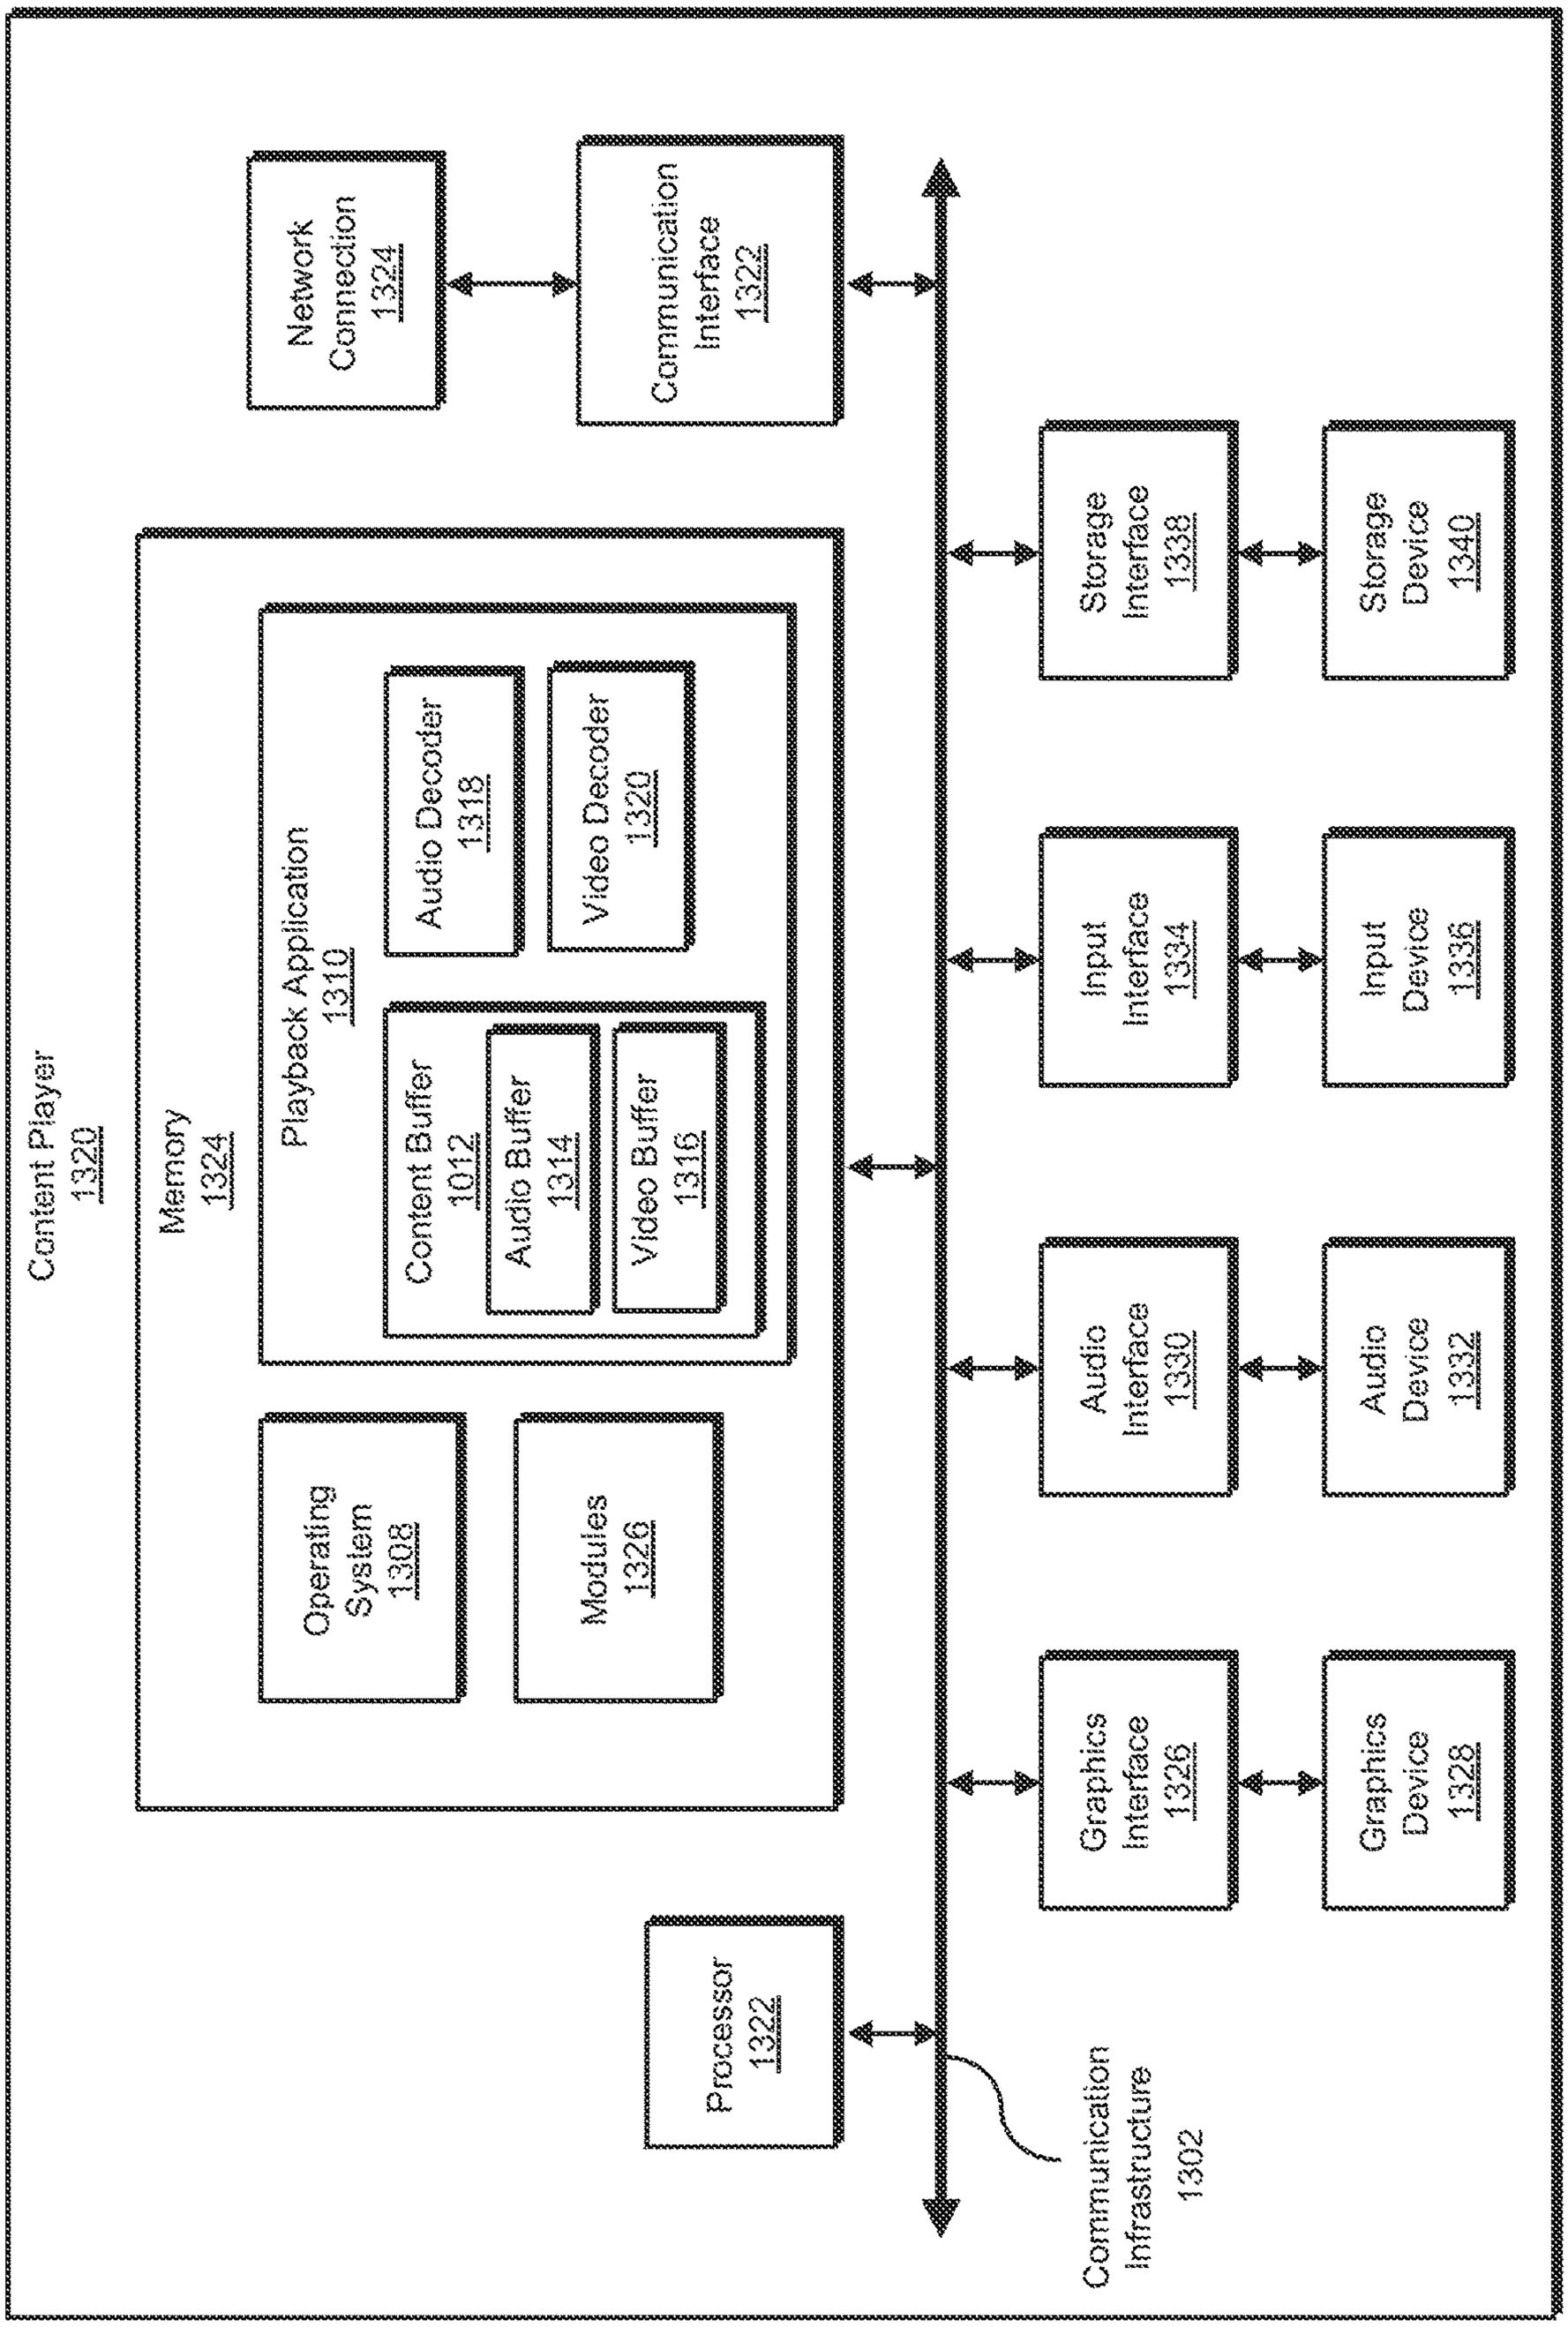
Content Player
1320
Memory
1324
Operating System
1308
Modules
1326
Playback Application
1310
Content Buffer
1012
Audio Buffer
1314
Video Buffer
1316
Audio Decoder
1318
Video Decoder
1320
Processor
1322
Communication Infrastructure
1302
Network Connection
1324
Communication Interface
1322
Audio Interface
1330
Audio Device
1332
Input Interface
1334
Input Device
1336
Storage Interface
1338
Storage Device
1340
Graphics Interface
1326
Graphics Device
1328

FIG. 13

METHODS AND SYSTEMS FOR PROVIDING DYNAMICALLY COMPOSED PERSONALIZED MEDIA ASSETS

CROSS REFERENCE

This application is a continuation of U.S. Application Ser. No. 17/810,259, filed Jun. 30, 2022, which is a continuation of U.S. application Ser. No. 17/190,350, filed Mar. 2, 2021, both of which are incorporated by reference in their entirety.

BACKGROUND

Each passing year results in the creation of many new movies, television shows, and other forms of audio and video content. This audio and video content is cumulative, in that older content remains available to users, while new content is continually added. As such, users may have access to so much audio and video content that they often become overwhelmed. To assist users in finding content that might be appealing to them, studios and other entities often create trailers or snippets of content to show users what the underlying audio or video content is generally about. From there, users may make the choice to watch the previewed content (e.g., a movie or television show), or may choose to view something else.

In some cases, movie studios or other content producing or content distributing entities may wish to create multiple trailers for a given movie or television show. In such cases, these entities would need to encode and digitally store each of these trailers separately. With the number of movies and tv shows continually growing, and with ever more selection among content, this continual generation and storage of multiple different trailers for each movie or television show may grow unwieldy and cumbersome.

SUMMARY

As will be described in greater detail below, the present disclosure generally describes methods and systems for generating and provisioning personalized media item playgraphs to playback devices. These personalized media item playgraphs allow multiple different trailers to be played from the same underlying media item.

In one example, a computer-implemented method for generating and provisioning personalized media item playgraphs to playback devices may include accessing a media item that includes multiple media item segments that are to be played back in a specific manner. The method may next include generating playgraphs for the media item, where the playgraphs define different playback paths between media item segments. The method may further include selecting a specific playgraph from the generated playgraphs, and then providing the selected playgraph to a playback device. Playback of the media item according to the selected playgraph thereby provides a customized presentation of the media item.

In some embodiments, the method further includes creating virtual assets for the media item. Each virtual asset may include a unique identifier that ties the virtual asset to the media item, as well as a specific selected playgraph that provides a defined playback pathway through the media item segments. In some examples, the media item may include multiple associated virtual assets.

In some cases, the method may further include determining that the media item is to be played back on the playback device, selecting a specific virtual asset among the virtual assets, and then streaming the media item and the selected virtual asset to the playback device. In this manner, the media item is playable on the playback device using the playgraph identified in the virtual asset.

In some examples, a specific virtual asset is selected for the playback device based on various personalization characteristics associated with a user of the playback device. The selected, personalized virtual asset may identify specific media item segments selected to appeal to the user of the playback device. The personalized virtual asset may further order the identified media item segments in a specified order that is designed to appeal to the user of the playback device. In some cases, the virtual assets may also identify the associated media item segments and the playback order using metadata tags.

In some embodiments, the media item may be a preview of a movie or television show. In such cases, the preview may include at least one introductory segment and at least one body segment. In some cases, the media item segments are selected from a plurality of different movies or television shows. In some examples, the method may further include selecting a specified virtual asset from among the associated virtual assets, and sending the unique identifier for the selected virtual asset to the playback device. As such, the playback device may play back the media item according to a stored playgraph that is associated with the virtual asset identified by the unique identifier.

In addition, a corresponding system may include at least one physical processor and physical memory comprising computer-executable instructions that, when executed by the physical processor, cause the physical processor to: access a media item that includes media item segments that are to be played back in a specific manner, generate playgraphs for the media item, where the playgraphs define various different playback paths between media item segments, select a specific playgraph from the generated playgraphs, and provide the selected playgraph to a playback device. In this manner, playback of the media item according to the selected playgraph may provide a customized presentation of the media item.

In some examples, the computer-executable instructions may further cause the physical processor to dynamically create a virtual asset associated with the media item upon determining that the media item is to be accessed by the playback device. The virtual asset may include a unique identifier that ties the virtual asset to the media item. The virtual asset may also include a specific selected playgraph that provides a defined playback pathway through the media item segments.

In some cases, the virtual asset may be created dynamically upon determining that personalization information associated with a user that is associated with the playback device is unavailable. In some embodiments, the computer-executable instructions may further cause the physical processor to track which media item segments the user viewed on the playback device, and add the resulting tracking information to personalization information associated with the user. In some examples, the resulting tracking information notes which media item segments were personalized to the user and which media item segments were randomly selected.

In some cases, the computer-executable instructions may further cause the physical processor to generate a cadence template that aligns the media item segments of the virtual asset with various portions of music associated with the media item. In some examples, the generated cadence template may govern the order in which the media item seg-

ments are shown and/or the amount of time each media item segment is shown within the established ordering. In some cases, the media item segments are arranged such that devices that lack playgraph support will play back at least one introductory segment and at least one body segment.

In some examples, the above-described method may be encoded as computer-readable instructions on a computer-readable medium. For example, a computer-readable medium may include one or more computer-executable instructions that, when executed by at least one processor of a computing device, may cause the computing device to access a media item that includes a plurality of media item segments that are to be played back in a specific manner, generate a plurality of playgraphs for the media item, the playgraphs defining various different playback paths between media item segments, select a specific playgraph from the plurality of generated playgraphs, and provide the selected playgraph to a playback device, wherein playback of the media item according to the selected playgraph provides a customized presentation of the media item.

Features from any of the embodiments described herein may be used in combination with one another in accordance with the general principles described herein. These and other embodiments, features, and advantages will be more fully understood upon reading the following detailed description in conjunction with the accompanying drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate a number of exemplary embodiments and are a part of the specification. Together with the following description, these drawings demonstrate and explain various principles of the present disclosure.

FIG. **1** illustrates a computing environment in which personalized media item playgraphs are generated and provisioned to playback devices.

FIG. **2** is a flow diagram of an exemplary method for generating and provisioning personalized media item playgraphs to playback devices.

FIG. **3** illustrates an embodiment of a media item having multiple different virtual assets.

FIG. **4** illustrates an embodiment in which one or more virtual assets for a given media item are provisioned to a playback device.

FIG. **5** illustrates an embodiment in which a personalized virtual asset for a media item is provisioned to a playback device.

FIG. **6** illustrates an embodiment of a media item preview that includes multiple different potential segments.

FIG. **7** illustrates an embodiment of a media item having multiple media segments that are arranged in a specified order.

FIG. **8** illustrates an embodiment of a media item having multiple media segments of varying lengths that are arranged in a specified order to match corresponding musical elements.

FIG. **9** illustrates an alternative embodiment of a media item having multiple media segments of varying lengths that are arranged in a specified order to match corresponding musical elements.

FIG. **10** illustrates an alternative embodiment of a media item having multiple media segments of varying lengths that are arranged in a specified order to match corresponding musical elements.

FIG. **11** is a block diagram of an exemplary content distribution ecosystem.

FIG. **12** is a block diagram of an exemplary distribution infrastructure within the content distribution ecosystem shown in FIG. **11**.

FIG. **13** is a block diagram of an exemplary content player within the content distribution ecosystem shown in FIG. **11**.

Throughout the drawings, identical reference characters and descriptions indicate similar, but not necessarily identical, elements. While the exemplary embodiments described herein are susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. However, the exemplary embodiments described herein are not intended to be limited to the particular forms disclosed. Rather, the present disclosure covers all modifications, equivalents, and alternatives falling within the scope of the appended claims.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The present disclosure is generally directed to generating and provisioning personalized media item playgraphs to playback devices. As noted previously, the rate at which media content is generated is continually growing. Platforms that provide user-created content continue to grow in size, as do the number and size of professional movie and television studios. These movie and television studios, for instance, continually create new movies and television series to appeal to current and would-be subscribers. In order to entice people to watch these movies and television shows, studios create trailers that portray the media content in a specific way.

In some cases, for example, a single movie or television show may have different trailers that are designed to showcase the program in different ways. Some of the trailers for the program may emphasize action clips that include car chases and explosions to portray the media content as action-packed. Other trailers for the same program may focus more on witty or funny lines of dialogue to portray the program as more of a comedy. Still other trailers for the program may focus on dialogue and one-on-one scenes to portray the program as more of a documentary, science fiction, horror, drama, children and family film, or other type of trailer. Regardless of the different goals related to a given trailer, in traditional systems, each of these trailers is separately encoded as its own media file and is stored along with the other media content, including the underlying movie or tv on which the trailer is based. With so much media content being created and made available for streaming or download, the digital storage devoted to various trailer types continues to grow increasingly higher.

In contrast to these traditional methods, the systems and methods described herein may be configured to store a single data structure that includes the various media segments that may be used in a trailer, along with a playgraph that determines how playback will proceed through the media segments. Using a single encoded block of media segments and a playgraph that specifies how playback will proceed through the media segments, the systems herein may store a single data file and extract from that single data file multiple different trailers or introductory snippets that help generate interest in a media item. This single data file (often referred to as a "mega asset" herein) may include multiple different introductory clips that may be played at the beginning, middle, or end of each trailer, and multiple different types of clips that may provide a different feel or a different portrayal of the media item.

These methods and systems may also create virtual assets that contain different playgraph paths through the mega asset. Each virtual asset may combine different introductory clips, different body clips, and different closing clips to create a full trailer. The systems described herein may assign each virtual asset its own unique identifier, and may then select specific virtual assets for specific users, thereby personalizing the playback experience of the mega asset for each user. The systems described herein may also track each user's path through the virtual asset playgraph as a form of feedback, indicating whether the user stayed engaged, whether the user watched the media item previewed by the trailer, or whether the user performed some other anticipated or unanticipated action.

Programmatic video sequencing may also be applied to the virtual asset as it is played back on a playback device. Using programmatic video sequencing, scenes, edits, and cuts between clips may be timed to align with a specific song, beat, or rhythm. In such cases, the systems described herein may play back the scenes stored in the mega asset as indicated by the personalized, virtual asset, according to the timing or cadence of an associated music clip. Still other embodiments provide options for devices that may lack the ability to playback media items using a playgraph. Each of these embodiments will be described in greater detail below with regard to FIGS. **1-13**.

FIG. **1** illustrates a computing environment **100** that includes a computer system **101**. The computer system **101** includes software modules, embedded hardware components such as processors, or includes a combination of hardware and software. The computer system **101** includes substantially any type of computing system including a local computing system or a distributed (e.g., cloud) computing system. In some cases, the computer system **101** includes at least one processor **102** and at least some system memory **103**. The computer system **101** includes program modules for performing a variety of different functions. The program modules are hardware-based, software-based, or include a combination of hardware and software. Each program module uses computing hardware and/or software to perform specified functions, including those described herein below.

The computer system **101** includes a communications module **104** that is configured to communicate with other computer systems. The communications module **104** includes any wired or wireless communication means that can receive and/or transmit data to or from other computer systems. These communication means include hardware interfaces including Ethernet adapters, WIFI adapters, hardware radios including, for example, a hardware-based receiver **105**, a hardware-based transmitter **106**, or a combined hardware-based transceiver capable of both receiving and transmitting data. The radios are cellular radios, Bluetooth radios, global positioning system (GPS) radios, or other types of radios. The communications module **104** is configured to interact with databases, mobile computing devices (such as mobile phones or tablets), embedded or other types of computing systems.

The computer system **101** also includes an accessing module **107**. The accessing module **107** may be configured to access media items **121** from data store **120**. The media items **121** may be substantially any type of media item, including videos, movies, television shows, songs, podcasts, audio books, picture galleries, or any other type of media item. Each of these media items **121** may include one or more different segments **123**. These segments may be divided up in a variety of ways. In the case of movies or television shows, for example, media segments may include short snippets of dialogue, full or partial scenes, full or partial video shots (e.g., zoom shots, panorama shots, close-up shots, etc.), individual chapters, paragraphs, or sentences from an audio book, snippets from a podcast, or other divisible portions of the media item including single frames or images. Thus, the accessing module **107** may access the media item **122** including one or more of its component media item segments **123**.

Once a specific media item **122** has been accessed, the playgraph generating module **108** may generate one or more playgraphs **109** for the media item. The playgraphs **109** specify one or more different playback paths through the media item segments **123**. For example, in contrast to traditional playback systems that play back a media item sequentially from a starting position to an ending position, the embodiments described herein may be configured to begin playback at substantially any position within a media item **122** or may begin playback with substantially any media item segment **123**. Then, from that specified starting point, the playgraph may dictate a flow through the media item **122** or the media item segments **123** that may be nonlinear, flowing between different out-of-order media item segments as dictated by the playgraph and/or as dictated by inputs **118** from a viewing user (e.g., **116**). The playgraph may specify that, for instance, playback is to start with media item segment B, then go to media item segment D, then play media item segment A, omitting media item segment entirely, in a case where media item segments A, B, C, and D are all encoded into a single data structure.

In some embodiments, the media item **122** may be a trailer for a movie or television show. The trailer may include multiple different segments including an introductory clip, multiple body clips, and a closing clip. The playgraph **109** may dictate many different paths through these clips. In some cases, the introductory clip may be played initially, followed by body clip A, then body clip C, omitting body clip B in the process, or body clip C may be played before A and the closing clip may be omitted. As will be understood and as will be explained further below, the playgraph **109** may direct playback through multiple optional playback paths **110** that may be sequential or non-sequential relative to the order in which the media item segments **123** were initially encoded.

The playgraph selecting module **111** may then select, from among potentially many different playgraphs **109** that were generated for the media item **122**, a selected playgraph **112** that is to be used for this specific playback (e.g., for this specific user **116** or playback device **117**). The selected playgraph **112** may be personalized for the user **116**, providing the user with a trailer that is played back in a customized manner to provide a specific feel or a specific appeal to that user. For instance, the trailer may highlight movie clips that showcase an actor or actress that the user **116** has shown an interest in, or may highlight certain segments that show the genre or some of the comedic moments of the movie. Other personalizations may also be made such that the trailer playback experience is truly customized to the user **116**. After the playgraph **112** has been selected, the provisioning module **113** may stream, download, broadcast, or otherwise provide the media item **122** and selected playgraph **112** to the playback device **117**, thereby providing a customized media item playback for that user. This process will be explained in greater detail below with regard to method **200** of FIG. **2** and with regard to the embodiments of FIGS. **3-13**.

FIG. **2** is a flow diagram of an exemplary computer-implemented method **200** for generating and provisioning

personalized media item playgraphs to playback devices. The steps shown in FIG. **2** may be performed by any suitable computer-executable code and/or computing system, including the system illustrated in FIG. **1**. In one example, each of the steps shown in FIG. **1** may represent an algorithm whose structure includes and/or is represented by multiple substeps, examples of which will be provided in greater detail below.

As illustrated in FIG. **2**, at step **210** of method **200**, one or more of the systems described herein may access a media item that includes multiple media item segments that are to be played back in a specific manner. While the media items **121** described herein may often refer to movie trailers, it will be understood that these principles may be applied to full-length movies, trailers for television shows or full-length television shows, trailers for audio books or full-length audio books, etc. In some cases, multiple movie clips may be selected and combined into a single media item **122** with multiple media item segments **123**. This single media item (or "mega asset" herein) may include five, 10, 15, 20, or more clips from a movie, all sequentially combined into a single encoded data structure such as an MPEG 4 or h.264 video file. This mega asset may include many different types of clips from the same movie (or potentially clips from different movies of the same genre, for example), each of which may be identified using metadata. For instance, a clip that portrays comedy may be labeled with metadata indicating that it is a comedy clip, or a clip that portrays a specific actor or action scene or other indicator may be labeled as such. Accordingly, the media item **122** may include many different clips from the movie, arranged in substantially any order, and intended to provide the basis for many different versions of a trailer. These different versions, then, can be tailored to individual users.

At step **220** of method **200**, the playgraph generating module **108** may generate multiple different playgraphs **109** for the media item **122**. The playgraphs **109** may define different playback paths between media item segments **123**. Thus, for example, if a media item **122** had five movie segments, one playgraph may indicate that a specific trailer is to be played back to a user (e.g., **116**) by playing segments 2, 4, 3, and then finishing with 5. Another playgraph may indicate that a specific trailer is to be played back by ordering segments 1, then 4, then 5. Yet another playgraph may indicate that a specific trailer is to play segment 1, then segment 5, then segments 2, 3, and 4. It will be understood here that the playgraph **109** may include or exclude any of the clips included in the media item **122**, and may play the clips in any order relative to the way the clips were encoded and stored as the finalized mega asset.

At step **230**, the playgraph selecting module **111** may select a specific playgraph **112** from the various generated playgraphs **109**. Specific playgraphs may have specific goals. For example, the goal of a specific trailer may be to appeal to a given user. Based on information that is known about that user (e.g., user **116**), the playgraph selecting module **111** may select a playgraph that will provide a playback path **110** that chooses clips (and potentially the ordering of those clips) that will appeal to that user. The playgraph selecting module **111** may select other playgraphs for other users to appeal to the personal preferences of those users. Moreover, instead of the data store **120** having to store multiple different versions of a trailer to appeal to the tastes of different users, the embodiments herein allow storage of a single media file that includes all of the clips that may be used in a given trailer. Then, the computer system **101** determines which ordering of clips is to be used to create a customized trailer for each user. Once the playgraph selecting module **111** has selected the playgraph **112** for that user, the provisioning module **113**, at step **240** of method **200**, provides the selected playgraph **112** to the user's playback device **117**. The user's device then plays back the media item **122** according to the selected playgraph, thereby providing a customized presentation of the media item that is tailored to the user **116**.

Turning now to FIG. **3**, a media item **301** is presented that has multiple different virtual assets **302***a* and **302***b*. The virtual asset generating module **119** of FIG. **1** may be used to generate a virtual asset **125**. As the term is used herein, a "virtual asset" may refer to a data structure that includes a unique identifier **126** that ties the virtual asset **125** to the media item **122**, as well as a specific selected playgraph **112** that provides a defined playback path **110** through the media item segments **123**. Thus, in FIG. **3**, virtual asset **302***a* may include a unique identifier **303***a* that uniquely identifies that virtual asset **302***a*, as well as a selected playgraph **304***a* that defines a specific playback pathway **305***a*. Similarly, virtual asset **302***b* may include a unique identifier **303***b* that uniquely identifies virtual asset **302***b*, as well as a selected playgraph **304***b* that defines a specific playback pathway **305***b*. While the media item **301** is shown as having two virtual assets, it will be understood that each media item may have substantially any number of virtual assets.

Each virtual asset may be looked at as a packaged or "canned" path through a series of media segments. Accordingly, as explained with regard to FIG. **1**, a media item **122** may include many different segments **123**, and each playgraph **109** may provide different pathways through those segments. A virtual asset may thus represent a specific type of trailer that plays back specifically chosen media segments in a specific order according to the selected playgraph. In one example, the virtual asset **302***a*, identified by identifier **303***a*, may include a playgraph **304***a* that plays back specifically selected media item segments according to a playback pathway **305***a* that portrays the media item as a comedy film. In this example, the same media item **301** may have another virtual asset, identified by identifier **303***b*, that includes a playgraph **304***b* that plays back different selected media item segments according to a playback pathway **305***b* that portrays the media item as a science fiction movie. Thus, in this example, the virtual asset **302***a* may be referred to as the "comedy trailer" and the virtual asset **302***b* may be referred to as the "science fiction trailer." Many other such trailers are possible, and each may be uniquely identified. In this manner, a media item that has been encoded into a single, fixed form, can be the source of many different trailers or other types of media previews.

In some cases, the playback device **117** of FIG. **1** may be configured to play back a trailer using a virtual asset. In one embodiment, the computer system **101** may determine which media item is to be played back on the playback device, determine which virtual asset is to be used, and then stream the media item and the selected virtual asset to the playback device. Then, the playback device **117** plays back the media item segments according to the playgraph identified in the virtual asset. For example, as shown in embodiment **400** of FIG. **4**, a media item **402** may include many different virtual assets **403***a*, **403***b*, and **403***c*. Any one of these virtual assets may be used to provide a preview of the media item **402** on the playback device **401**. When the playback device **401** receives a specific virtual asset (e.g., **403***b*), the playback device will access the playgraph identified in that virtual asset and will play back the media item **402** according to that playgraph.

In this manner, a movie producer or movie distributor may create a single data structure that stores multiple different clips that may be used in a trailer. The movie producer or distributor may then determine which version of the trailer is to be shown to a given user. Once the type or version of trailer has been chosen, the virtual asset corresponding to that type of trailer may be sent to the playback device **401**, along with the media item **402**, for playback according to the playgraph identified in the virtual asset. Over time, movie producers or distributors may continue to add new virtual assets to existing media items, or may remove previously existing virtual assets from the media item. At least in some cases, end users may be permitted to create their own virtual assets for a media item. These user-generated virtual assets may specify customized playback paths that are then associated with a unique identifier for that virtual asset.

In some cases, a specific virtual asset may be selected for a playback device based on personalization characteristics associated with a user of the playback device. For example, in FIG. **4**, if media item **402** has three different virtual assets **403***a*, **403***b*, and **403***c*, each representing a different style of trailer or a different version of a trailer, the trailer version most suited to a given user may be selected and provided to that user. As shown in embodiment **500** of FIG. **5**, for example, a user **501** may use their phone, tablet, PC, television, streaming stick, or other playback device **502** to play back media including movies, television, and songs. When playing back these media items, the user **501** may provide input data **503** that may be used to identify preferences or to select certain media items for playback or for preview. The personalization module **504** may be configured to note these personalization characteristics **505**, and may build a profile of the user **501** over time.

The personalization characteristics **505** may include preferences for certain genres, certain actors or actresses, preferences for movies from certain time periods (e.g., the 70's or 80's), preferences for certain directors, preferences for musical groups or artists, or other personal preferences. These preferences may be developed and refined over time, as the personalization module **504** collects data regarding the user's interactions with the data streaming platform (e.g., tracking data **511**, which may be stored in database **510**), and collects other information that may be used to provide personalized trailers or other personalized content. Additionally or alternatively, personalization characteristics **505** may include an indication of the user's country, locale, past views, other user's views, impressions (e.g., which media items were presented to the user in a user interface), indications of whether the user watched the trailer to completion and whether they watched the media item being previewed, as well as indications of which menu items or features the user selected after watching the trailer.

Accordingly, in this manner, the personalization module **504** may be designed to select specific media item segments or specific virtual assets that appeal to the user **501** of the playback device **502** according to the determined personalization characteristics **505**. Once a specific personalized virtual asset **506** has been selected, the personalization module **504** may send that personalized virtual asset **506** to the playback device **502**, after which the media item segments **507** of the corresponding mega asset will be played back according to a playgraph associated with the personalized virtual asset **506**.

In some cases, the personalized virtual asset **506** arranges the identified media item segments in a specific order that is designed to appeal to the user **501** of the playback device **502**. The segment ordering module **508** of the personalization module **504** may determine the order in which the media item segments **507** are to be played back. The order may be sequential relative to the underlying mega asset, or may be non-sequential. Administrators or other users that design personalized virtual assets (e.g., **506**) may be free to select which media item segments **507** will be part of a given virtual asset, and may also select the order in which those selected segments are shown. Thus, each personalized virtual asset may be individually customized to many different, specific users, while all being based on the same underlying single data structure.

In some embodiments, the virtual assets (e.g., **506**) identify the associated media item segments **507** and the playback order using metadata tags **509**. The metadata tags **509** may specify media item segments by number or by name or by timestamp within the mega asset. The metadata tags **509** may also specify the order in which the media item segments **507** are to be played back, indicating, for example, that media item segments A, B, and D are to be played back in a specific personalized virtual asset in the order D, A, B. Other users may receive metadata tags **509** indicating that media item segments B, C, and D are to be played back in the order C, B, D, and so on. Thus, even in an example mega asset that only included four media item segments (A, B, C, and D), many playback combinations and orderings are possible.

In some examples, a media item (e.g., **402** of FIG. **4**) may be a preview of a movie or television show, and that preview may include at least one introductory segment and at least one body segment. For instance, as shown in FIG. **6**, the media item **601** may include introductory segment **602**, body segments **603-605** (along with potentially other body segments **606**), and a closing segment **607**. Other types of body segments may also be used, and not every preview may include introductory, body, or closing segments. Each media item segment may be identified using metadata tags (e.g., **509** in FIG. **5**). In some cases, an introductory segment **602** may be a segment that introduces the media item **601**. In some embodiments, the introductory segment **602** is shown at the beginning of each virtual asset, regardless of whether that virtual asset is intended to promote a comedy, a drama, an action film, etc. In other cases, different introductory segments or even body segments may be used as an introduction. In some cases, different trailers may be composed of an introductory segment **602**, one or more body segments **603-605**, and a closing segment **607**. Any of these media item segments may be played back in any order. The playgraph associated with the virtual asset (e.g., personalized virtual asset **506** of FIG. **5**) may indicate which segments are to be played as part of any given trailer, as well as the order in which those segments are to be played. The media item segments **602-607** may all be from the same movie or television show, or they may be aggregated from different films (e.g., from multiple films in a given film series) or may be aggregated from different television shows (e.g., from multiple episodes of a television show).

In some embodiments, the user **501** may have never used the media streaming service or other type of media item host. In such cases, the media streaming service may not have any tracking data **511** or inputs from the user **501** on which to personalize a virtual asset. Accordingly, in such cases, the media streaming service (which may include or may implement computer system **101** of FIG. **1** and/or the personalization module **504** of FIG. **5**) may dynamically create a virtual asset on the fly. The virtual asset generating module **119** of FIG. **1** may, upon determining that personalization information associated with user **116** (or user **501**)

is unavailable, automatically generate a virtual asset **125**. The virtual asset **125** may include a generic playgraph that is used by default when the requesting user is unknown, or may include a curated playgraph that contains segments chosen based on popularity, or may include a specific version of playgraph that is designed to portray a documentary feel, or a foreign drama feel, etc.

The computer system **101** may then track which media item segments the user **116** viewed on the playback device **117** based on the version of the mega asset that was ultimately shown to the user. This selection data and other viewing information may be stored in a data store and used to personalize virtual assets to that user in the future. Moreover, this tracking data may be used to personalize virtual assets for other users that have similar tastes or have made similar viewing selections. In at least some cases, the resulting tracking information may note which media item segments were personalized to the user and which media item segments were randomly selected or were selected from a list of default virtual assets. Over time, and after tracking the viewing and media selection actions of many different users, the computer system **101** may build up a personalization database that allows it to tailor virtual assets to each user, knowing which media item segments or which virtual assets are likely to have the desired effect of leading the user to watch, listen to, or otherwise consume a given media item.

In some cases, instead of sending a full virtual asset to a user's playback device, the computer system **101** may simply send a unique identifier that identifies the virtual asset. For example, in some embodiments, the playback device **117** may have one or more virtual assets stored in memory. The computer system **101** may thus choose an appropriate virtual asset to send to the user's playback device **117** and, instead of sending the virtual asset **125**, the computer system may only send an identifier **126** identifying the selected virtual asset. The user's playback device **117** will then access the virtual asset identified by the identifier **126** and play back the specific media item segments identified in that virtual asset. In this manner, the playback device **117** plays back the media item **122** according to a stored playgraph that is associated with the virtual asset identified by the unique identifier **126**. In some cases, a media item may not have an associated virtual asset. In such cases, the computer system **101** may dynamically create a virtual asset **125** associated with the media item **122**. Such creation may occur upon determining that the media item **122** is to be accessed by the playback device **117** (e.g., upon receiving an input **118** from the playback device indicating that the media item **122** is to be played. The dynamically created virtual asset may be assigned a unique identifier that ties the virtual asset **125** to the media item **122** and thereby provides a specific playgraph that offers a defined playback pathway through the media item segments **123** associated with the media item **122**.

In some cases, a virtual asset may be generated based on multiple different media items. While the embodiments described above generally refer to scenarios where a playgraph defines a playback path through a single mega asset, it will be recognized that a playgraph may specify a playback path through a plurality of different media items and/or media clips. Thus, for example, the computer system **101** of FIG. **1** may be configured to access alternative media items in addition to or in place of media item **122**. These alternative media items may include live television shows or newly released television shows or movies that are not part of an existing mega asset. In such cases, the playgraph generating module **108** may be configured to generate a playgraph **109** that defines a playback path **110** through multiple different alternative media items. This playback path **110** may include a portion of a mega asset, or may define a playback path that is comprised solely of alternative media items. In this manner, playback on the user's device **117** according to such a playgraph would include portions of many different (potentially updated or newly released) media items.

In one specific embodiment, the computer system **101** may access various alternative media items (e.g., that are separate from an underlying mega asset), generate an updated playgraph **109** that includes one or more of these alternative media items, and may then provide the updated playgraph to the playback device **117**. As such, the playback device **117** will play back the various alternative media items according to the updated playgraph. Allowing a playgraph to draw from multiple different media items (in addition to or instead of drawing from a mega asset) may provide greater flexibility and an increased level of personalization. For instance, instead of having a single mega asset to draw from, the computer system **101** may access many newly released or updated media items and create playgraphs that include some or all of these different media items. In this manner, as media items come and go from a media distribution service, for example, each user is continually provided an updated and personalized playgraph that includes clips of newly released or newly added shows from many different media items that users are likely to want to see.

FIG. **7** illustrates an embodiment in which a cadence template is generated for a given virtual asset. The computer system **101** of FIG. **1** or similar computing system or functionality module may generate the cadence template. As the term is used herein, a "cadence template" may refer to a pattern or design that aligns music with media item segments or edits between segments. The music may include a song that is to be used with a trailer, a musical score, a music snippet, a collection of songs or snippets, or other musical arrangement. The media item segments or clips, as noted above, may be substantially any length, and may be in any order. The media item **701** of FIG. **7**, for example, may include different media item segments: segment A (**702**), segment B (**703**), segment C (**704**), segment D (**705**), and segment E (**706**). The corresponding music to which the media item segments are to be aligned may have specific beats or pauses or rhythms that are to be followed when stringing the media item segments together. When properly aligned, the changes between media item segments, or the changes between video shots, or the changes between video scenes will align with the beats or rhythms of the accompanying music. Thus, generating a cadence template may align the media item segments of the virtual asset with music that will be played back alongside and in tandem with the video, sounds, and dialogue of the media item.

FIG. **7** may thus represent a media item **701** with a predetermined collection of clip lengths. For example, segment A (**702**) has a clip length of 160 video frames. Segment B (**703**) has a clip length of 80 frames, segment C (**704**) has a clip length of 160 frames, segment D has a clip length of 40 frames, and segment E (**706**) has a clip length of 40 frames. It will be understood that the clips may include substantially any number of video frames. Moreover, it will be understood that the media item segments (i.e., clips) may be edited or cut to include a specified number of video frames (e.g., 160 frames). The media item segments **702-706** do not need to be played back sequentially and can be played in any order, as specified in a corresponding playgraph. The

clips may be from different television shows or different movies, or may be from the same tv show or movie. Generating a cadence template ensures that all of the cuts or changes between shots or scenes are on the beat of the music. In some cases, the computer system **101** may be configured to analyze the music that is to accompany the trailer and may determine the music's number of beats per minute. The cadence template may then reorder or cut (or extend) the clip lengths to ensure that the clip lengths match the music's number of beats per minute.

As can be seen in FIG. **8**, the clips **802-806** of media item **801** may be played in different groupings and the clips themselves may be cut into different lengths. Grouping **807** (which may comprise one version of a trailer) may include Title A (**802**) with 160 frames. In grouping **808**, Title A may also include 160 video frames. However, in grouping **809** (which may be another version of a trailer), Title A only has 80 video frames, indicating that it has been cut to include only half the original number of frames. Other numbers of frame changes are apparent in the cascading listing of frame numbers **810**.

In some cases, the title of the media item or its associated level of importance (e.g., it's a hotly anticipated new release) dictate the cadence. For instance, more important titles may have more video total video frames allotted to them, while lesser movies or tv shows may have fewer total video frames allotted to them. In some cases, the level of importance associated with a given title is based on personalization. As, the cadence template may show more of titles that are likely to appeal to that user. Thus, as shown in FIG. **9**, a given media item **901** may have many different clips from the same movie or movie series or tv show or tv series, or may have clips from different movies or tv shows. These movies may be linked by a common actor or common director or common theme or genre. Titles that are most likely to appeal to the user may receive a higher total number of video frames within a given cadence template.

As can be seen in chart **907**, clips A (**902**) include a first clip with 160 frames, a second clip with 160 frames, and a third clip with 80 frames for a total of 400 frames. This is assigned a personalization ranking of #1. Other clips with lower personalization rankings have lower numbers of total frames (e.g., clips C (**904**) have 320 total frames and a ranking of #2, clips B (**903**) have 200 total frames and a ranking of #3, clips D (**905**) have 160 total frames and a ranking of #4, and clips E (**906**) have 120 total frames and a ranking of #5. Thus, titles that are determined to be more important to a user (based on any of the personalization factors described above) are ranked higher and include a higher number of video frames in the corresponding cadence template. Because each title may have many different clips to choose from, and different clip lengths within those clips, each trailer may be customized specifically for each user. Accordingly, FIG. **10** illustrates an embodiment in which a media item **1001** includes clips A (**1002**), B (**1003**), C (**1004**), D (**1005**), and E (**1006**). User **1007** may receive portions of these clips A-E, but in the order C, B, D, A, E. Whereas user **1008** may receive different portions of each of these clips A-E, but in the order A, C, B, E, D. Each of these clips may be aligned with the music that goes along with the trailer, according to the corresponding cadence template.

The cadence template thus governs the order in which the media item segments are shown and the amount of time each segment is shown within the established ordering. Furthermore, the cadence template may provide a certain level of intensity. For example, the pace of cutting, sound effects, volume levels, etc. and other elements may affect how intense a trailer comes across to a user. The cadence templates may thus take these elements into account and may generate trailers with high, medium, or low levels of intensity to make the trailer feel more or less intense as desired.

In some cases, a playback device may not support playgraphs or non-sequential playback of a media item. In such cases, the media item segments may be arranged such that devices that lack playgraph support will play back specific segments and then stop playback. For instance, playback devices that do not support playgraph may play an introductory segment followed by at least one or two body segments. Alternatively, such playback devices may simply be instructed to begin playback at a specified point in the mega asset and continue playback sequentially straight to the end. Thus, even for devices that don't support playgraph playback, such users may still be able to view trailers that are at least somewhat tailored to or customized for them.

Accordingly, methods and systems are provided that personalize a trailer to a given user while using smaller amounts of disk space. Indeed, a single mega asset may be stored that provides clips for many different potential trailers. Playgraphs may then be generated that lead the playback device to specific clips in a specific order to create a tailored trailer for that user. Moreover, cadence templates may be used to align the customized trailer to a given song or rhythm. This may allow content creators to create different intensity levels within the trailers and truly portray the film or television show in different ways to different people.

The following will provide, with reference to FIG. **11**, detailed descriptions of exemplary ecosystems in which content is provisioned to end nodes and in which requests for content are steered to specific end nodes. The discussion corresponding to FIGS. **12** and **13** presents an overview of an exemplary distribution infrastructure and an exemplary content player used during playback sessions, respectively.

FIG. **11** is a block diagram of a content distribution ecosystem **1100** that includes a distribution infrastructure **1110** in communication with a content player **1120**. In some embodiments, distribution infrastructure **1110** is configured to encode data at a specific data rate and to transfer the encoded data to content player **1120**. Content player **1120** is configured to receive the encoded data via distribution infrastructure **1110** and to decode the data for playback to a user. The data provided by distribution infrastructure **1110** includes, for example, audio, video, text, images, animations, interactive content, haptic data, virtual or augmented reality data, location data, gaming data, or any other type of data that is provided via streaming.

Distribution infrastructure **1110** generally represents any services, hardware, software, or other infrastructure components configured to deliver content to end users. For example, distribution infrastructure **1110** includes content aggregation systems, media transcoding and packaging services, network components, and/or a variety of other types of hardware and software. In some cases, distribution infrastructure **1110** is implemented as a highly complex distribution system, a single media server or device, or anything in between. In some examples, regardless of size or complexity, distribution infrastructure **1110** includes at least one physical processor **1112** and at least one memory device **1114**. One or more modules **1116** are stored or loaded into memory **1114** to enable adaptive streaming, as discussed herein.

Content player **1120** generally represents any type or form of device or system capable of playing audio and/or video content that has been provided over distribution infrastructure **1110**. Examples of content player **1120** include, without

limitation, mobile phones, tablets, laptop computers, desktop computers, televisions, set-top boxes, digital media players, virtual reality headsets, augmented reality glasses, and/or any other type or form of device capable of rendering digital content. As with distribution infrastructure **1110**, content player **1120** includes a physical processor **1122**, memory **1124**, and one or more modules **1126**. Some or all of the adaptive streaming processes described herein is performed or enabled by modules **1126**, and in some examples, modules **1116** of distribution infrastructure **1110** coordinate with modules **1126** of content player **1120** to provide adaptive streaming of multimedia content.

In certain embodiments, one or more of modules **1116** and/or **1126** in FIG. **11** represent one or more software applications or programs that, when executed by a computing device, cause the computing device to perform one or more tasks. For example, and as will be described in greater detail below, one or more of modules **1116** and **1126** represent modules stored and configured to run on one or more general-purpose computing devices. One or more of modules **1116** and **1126** in FIG. **11** also represent all or portions of one or more special-purpose computers configured to perform one or more tasks.

In addition, one or more of the modules, processes, algorithms, or steps described herein transform data, physical devices, and/or representations of physical devices from one form to another. For example, one or more of the modules recited herein receive audio data to be encoded, transform the audio data by encoding it, output a result of the encoding for use in an adaptive audio bit-rate system, transmit the result of the transformation to a content player, and render the transformed data to an end user for consumption. Additionally or alternatively, one or more of the modules recited herein transform a processor, volatile memory, non-volatile memory, and/or any other portion of a physical computing device from one form to another by executing on the computing device, storing data on the computing device, and/or otherwise interacting with the computing device.

Physical processors **1112** and **1122** generally represent any type or form of hardware-implemented processing unit capable of interpreting and/or executing computer-readable instructions. In one example, physical processors **1112** and **1122** access and/or modify one or more of modules **1116** and **1126**, respectively. Additionally or alternatively, physical processors **1112** and **1122** execute one or more of modules **1116** and **1126** to facilitate adaptive streaming of multimedia content. Examples of physical processors **1112** and **1122** include, without limitation, microprocessors, microcontrollers, central processing units (CPUs), field-programmable gate arrays (FPGAs) that implement softcore processors, application-specific integrated circuits (ASICs), portions of one or more of the same, variations or combinations of one or more of the same, and/or any other suitable physical processor.

Memory **1114** and **1124** generally represent any type or form of volatile or non-volatile storage device or medium capable of storing data and/or computer-readable instructions. In one example, memory **1114** and/or **1124** stores, loads, and/or maintains one or more of modules **1116** and **1126**. Examples of memory **1114** and/or **1124** include, without limitation, random access memory (RAM), read only memory (ROM), flash memory, hard disk drives (HDDs), solid-state drives (SSDs), optical disk drives, caches, variations or combinations of one or more of the same, and/or any other suitable memory device or system.

FIG. **12** is a block diagram of exemplary components of content distribution infrastructure **1110** according to certain embodiments. Distribution infrastructure **1110** includes storage **1210**, services **1220**, and a network **1230**. Storage **1210** generally represents any device, set of devices, and/or systems capable of storing content for delivery to end users. Storage **1210** includes a central repository with devices capable of storing terabytes or petabytes of data and/or includes distributed storage systems (e.g., appliances that mirror or cache content at Internet interconnect locations to provide faster access to the mirrored content within certain regions). Storage **1210** is also configured in any other suitable manner.

As shown, storage **1210** may store a variety of different items including content **1212**, user data **1214**, and/or log data **1216**. Content **1212** includes television shows, movies, video games, user-generated content, and/or any other suitable type or form of content. User data **1214** includes personally identifiable information (PII), payment information, preference settings, language and accessibility settings, and/or any other information associated with a particular user or content player. Log data **1216** includes viewing history information, network throughput information, and/or any other metrics associated with a user's connection to or interactions with distribution infrastructure **1110**.

Services **1220** includes personalization services **1222**, transcoding services **1224**, and/or packaging services **1226**. Personalization services **1222** personalize recommendations, content streams, and/or other aspects of a user's experience with distribution infrastructure **1110**. Encoding services **1224** compress media at different bitrates which, as described in greater detail below, enable real-time switching between different encodings. Packaging services **1226** package encoded video before deploying it to a delivery network, such as network **1230**, for streaming.

Network **1230** generally represents any medium or architecture capable of facilitating communication or data transfer. Network **1230** facilitates communication or data transfer using wireless and/or wired connections. Examples of network **1230** include, without limitation, an intranet, a wide area network (WAN), a local area network (LAN), a personal area network (PAN), the Internet, power line communications (PLC), a cellular network (e.g., a global system for mobile communications (GSM) network), portions of one or more of the same, variations or combinations of one or more of the same, and/or any other suitable network. For example, as shown in FIG. **12**, network **1230** includes an Internet backbone **1232**, an internet service provider **1234**, and/or a local network **1236**. As discussed in greater detail below, bandwidth limitations and bottlenecks within one or more of these network segments triggers video and/or audio bit rate adjustments.

FIG. **13** is a block diagram of an exemplary implementation of content player **1120** of FIG. **11**. Content player **1120** generally represents any type or form of computing device capable of reading computer-executable instructions. Content player **1120** includes, without limitation, laptops, tablets, desktops, servers, cellular phones, multimedia players, embedded systems, wearable devices (e.g., smart watches, smart glasses, etc.), smart vehicles, gaming consoles, internet-of-things (IoT) devices such as smart appliances, variations or combinations of one or more of the same, and/or any other suitable computing device.

As shown in FIG. **13**, in addition to processor **1122** and memory **1124**, content player **1120** includes a communication infrastructure **1302** and a communication interface **1322** coupled to a network connection **1324**. Content player **1120** also includes a graphics interface **1326** coupled to a graphics

device **1328**, an input interface **1334** coupled to an input device **1336**, and a storage interface **1338** coupled to a storage device **1340**.

Communication infrastructure **1302** generally represents any type or form of infrastructure capable of facilitating communication between one or more components of a computing device. Examples of communication infrastructure **1302** include, without limitation, any type or form of communication bus (e.g., a peripheral component interconnect (PCI) bus, PCI Express (PCIe) bus, a memory bus, a frontside bus, an integrated drive electronics (IDE) bus, a control or register bus, a host bus, etc.).

As noted, memory **1124** generally represents any type or form of volatile or non-volatile storage device or medium capable of storing data and/or other computer-readable instructions. In some examples, memory **1124** stores and/or loads an operating system **1308** for execution by processor **1122**. In one example, operating system **1308** includes and/or represents software that manages computer hardware and software resources and/or provides common services to computer programs and/or applications on content player **1120**.

Operating system **1308** performs various system management functions, such as managing hardware components (e.g., graphics interface **1326**, audio interface **1330**, input interface **1334**, and/or storage interface **1338**). Operating system **1308** also provides process and memory management models for playback application **1310**. The modules of playback application **1310** includes, for example, a content buffer **1312**, an audio decoder **1318**, and a video decoder **1320**.

Playback application **1310** is configured to retrieve digital content via communication interface **1322** and to play the digital content through graphics interface **1326**. Graphics interface **1326** is configured to transmit a rendered video signal to graphics device **1328**. In normal operation, playback application **310** receives a request from a user to play a specific title or specific content. Playback application **310** then identifies one or more encoded video and audio streams associated with the requested title. After playback application **1310** has located the encoded streams associated with the requested title, playback application **1310** downloads sequence header indices associated with each encoded stream associated with the requested title from distribution infrastructure **1110**. A sequence header index associated with encoded content includes information related to the encoded sequence of data included in the encoded content.

In one embodiment, playback application **1310** begins downloading the content associated with the requested title by downloading sequence data encoded to the lowest audio and/or video playback bit rates to minimize startup time for playback. The requested digital content file is then downloaded into content buffer **1312**, which is configured to serve as a first-in, first-out queue. In one embodiment, each unit of downloaded data includes a unit of video data or a unit of audio data. As units of video data associated with the requested digital content file are downloaded to the content player **1120**, the units of video data are pushed into the content buffer **1312**. Similarly, as units of audio data associated with the requested digital content file are downloaded to the content player **1120**, the units of audio data are pushed into the content buffer **1312**. In one embodiment, the units of video data are stored in video buffer **1316** within content buffer **1312** and the units of audio data are stored in audio buffer **1314** of content buffer **1312**.

A video decoder **1310** reads units of video data from video buffer **1316** and outputs the units of video data in a sequence of video frames corresponding in duration to the fixed span of playback time. Reading a unit of video data from video buffer **1316** effectively de-queues the unit of video data from video buffer **1316**. The sequence of video frames is then rendered by graphics interface **1326** and transmitted to graphics device **1328** to be displayed to a user.

An audio decoder **1318** reads units of audio data from audio buffer **1314** and output the units of audio data as a sequence of audio samples, generally synchronized in time with a sequence of decoded video frames. In one embodiment, the sequence of audio samples is transmitted to audio interface **1330**, which converts the sequence of audio samples into an electrical audio signal. The electrical audio signal is then transmitted to a speaker of audio device **1332**, which, in response, generates an acoustic output.

In situations where the bandwidth of distribution infrastructure **1110** is limited and/or variable, playback application **1310** downloads and buffers consecutive portions of video data and/or audio data from video encodings with different bit rates based on a variety of factors (e.g., scene complexity, audio complexity, network bandwidth, device capabilities, etc.). In some embodiments, video playback quality is prioritized over audio playback quality. Audio playback and video playback quality are also balanced with each other, and in some embodiments audio playback quality is prioritized over video playback quality.

Graphics interface **1326** is configured to generate frames of video data and transmit the frames of video data to graphics device **1328**. In one embodiment, graphics interface **1326** is included as part of an integrated circuit, along with processor **1122**. Alternatively, graphics interface **1326** is configured as a hardware accelerator that is distinct from (i.e., is not integrated within) a chipset that includes processor **1122**.

Graphics interface **1326** generally represents any type or form of device configured to forward images for display on graphics device **1328**. For example, graphics device **1328** is fabricated using liquid crystal display (LCD) technology, cathode-ray technology, and light-emitting diode (LED) display technology (either organic or inorganic). In some embodiments, graphics device **1328** also includes a virtual reality display and/or an augmented reality display. Graphics device **1328** includes any technically feasible means for generating an image for display. In other words, graphics device **1328** generally represents any type or form of device capable of visually displaying information forwarded by graphics interface **1326**.

As illustrated in FIG. **13**, content player **1120** also includes at least one input device **1336** coupled to communication infrastructure **1302** via input interface **1334**. Input device **1336** generally represents any type or form of computing device capable of providing input, either computer or human generated, to content player **1120**. Examples of input device **1336** include, without limitation, a keyboard, a pointing device, a speech recognition device, a touch screen, a wearable device (e.g., a glove, a watch, etc.), a controller, variations or combinations of one or more of the same, and/or any other type or form of electronic input mechanism.

Content player **1120** also includes a storage device **1340** coupled to communication infrastructure **1302** via a storage interface **1338**. Storage device **1340** generally represents any type or form of storage device or medium capable of storing data and/or other computer-readable instructions. For example, storage device **1340** may be a magnetic disk drive, a solid-state drive, an optical disk drive, a flash drive, or the like. Storage interface **1338** generally represents any

type or form of interface or device for transferring data between storage device **1340** and other components of content player **1120**.

Many other devices or subsystems are included in or connected to content player **1120**. Conversely, one or more of the components and devices illustrated in FIG. **13** need not be present to practice the embodiments described and/or illustrated herein. The devices and subsystems referenced above are also interconnected in different ways from that shown in FIG. **13**. Content player **1120** is also employed in any number of software, firmware, and/or hardware configurations. For example, one or more of the example embodiments disclosed herein are encoded as a computer program (also referred to as computer software, software applications, computer-readable instructions, or computer control logic) on a computer-readable medium. The term "computer-readable medium," as used herein, refers to any form of device, carrier, or medium capable of storing or carrying computer-readable instructions. Examples of computer-readable media include, without limitation, transmission-type media, such as carrier waves, and non-transitory-type media, such as magnetic-storage media (e.g., hard disk drives, tape drives, etc.), optical-storage media (e.g., Compact Disks (CDs), Digital Video Disks (DVDs), and BLU-RAY disks), electronic-storage media (e.g., solid-state drives and flash media), and other digital storage systems.

A computer-readable medium containing a computer program is loaded into content player **1120**. All or a portion of the computer program stored on the computer-readable medium is then stored in memory **1124** and/or storage device **1340**. When executed by processor **1122**, a computer program loaded into memory **1124** causes processor **1122** to perform and/or be a means for performing the functions of one or more of the example embodiments described and/or illustrated herein. Additionally or alternatively, one or more of the example embodiments described and/or illustrated herein are implemented in firmware and/or hardware. For example, content player **1120** is configured as an Application Specific Integrated Circuit (ASIC) adapted to implement one or more of the example embodiments disclosed herein

EXAMPLE EMBODIMENTS

1. A computer-implemented method comprising: accessing a media item that includes a plurality of media item segments that are to be played back in a specific manner, generating a plurality of playgraphs for the media item, the playgraphs defining various different playback paths between media item segments, selecting a specific playgraph from the plurality of generated playgraphs, and providing the selected playgraph to a playback device, wherein playback of the media item according to the selected playgraph provides a customized presentation of the media item.

2. The computer-implemented method of claim 1, further comprising creating one or more virtual assets for the media item, each virtual asset including a unique identifier that ties the virtual asset to the media item and a specific selected playgraph that provides a defined playback pathway through the media item segments.

3. The computer-implemented method of claim 3, wherein the media item includes a plurality of associated virtual assets.

4. The computer-implemented method of claim 3, further comprising: determining that the media item is to be played back on the playback device, selecting a specific virtual asset among the plurality of virtual assets, and streaming the media item and the selected virtual asset to the playback device, such that the media item is playable on the playback device using the playgraph identified in the virtual asset.

5. The computer-implemented method of claim 3, wherein a specific virtual asset is selected for the playback device based on one or more personalization characteristics associated with a user of the playback device.

6. The computer-implemented method of claim 5, wherein the personalized virtual asset identifies specific media item segments selected to appeal to the user of the playback device.

7. The computer-implemented method of claim 6, wherein the personalized virtual asset further orders the identified media item segments in a specified order that is designed to appeal to the user of the playback device.

8. The computer-implemented method of claim 7, wherein the virtual assets identify the associated media item segments and the playback order using metadata tags.

9. The computer-implemented method of claim 6, wherein the media item comprises a preview of a movie or television show, and wherein the preview includes at least one introductory segment and at least one body segment.

10. The computer-implemented method of claim 6, wherein the media item segments are selected from a plurality of different movies or television shows.

11. The computer-implemented method of claim 3, further comprising: selecting a specified virtual asset among the plurality of associated virtual assets, and sending the unique identifier for the selected virtual asset to the playback device, such that the playback device plays back the media item according to a stored playgraph that is associated with the virtual asset identified by the unique identifier.

12. A system comprising: at least one physical processor and physical memory comprising computer-executable instructions that, when executed by the physical processor, cause the physical processor to: access a media item that includes a plurality of media item segments that are to be played back in a specific manner, generate a plurality of playgraphs for the media item, the playgraphs defining various different playback paths between media item segments, select a specific playgraph from the plurality of generated playgraphs, and provide the selected playgraph to a playback device, wherein playback of the media item according to the selected playgraph provides a customized presentation of the media item.

13. The system of claim 12, further comprising dynamically creating a virtual asset associated with the media item upon determining that the media item is to be accessed by the playback device, the virtual asset including a unique identifier that ties the virtual asset to the media item and further including a specific selected playgraph that provides a defined playback pathway through the media item segments.

14. The system of claim 13, wherein the virtual asset is created dynamically upon determining that personalization information associated with a user that is associated with the playback device is unavailable.

15. The system of claim 14, further comprising: tracking which media item segments the user viewed on the playback device, and adding the resulting tracking information to personalization information associated with the user.

16. The system of claim 15, wherein the resulting tracking information notes which media item segments were personalized to the user and which media item segments were randomly selected.

17. The system of claim 13, further comprising generating a cadence template that aligns the media item segments of the virtual asset with one or more portions of music associated with the media item.

18. The system of claim 17, wherein the generated cadence template governs the order in which the media item segments are shown and the amount of time each media item segment is shown within the established ordering.

19. The system of claim 12, wherein the media item segments are arranged such that devices that lack playgraph support will play back at least one introductory segment and at least one body segment.

20. A non-transitory computer-readable medium comprising one or more computer-executable instructions that, when executed by at least one processor of a computing device, cause the computing device to: access a media item that includes a plurality of media item segments that are to be played back in a specific manner, generate a plurality of playgraphs for the media item, the playgraphs defining various different playback paths between media item segments, select a specific playgraph from the plurality of generated playgraphs, and provide the selected playgraph to a playback device, wherein playback of the media item according to the selected playgraph provides a customized presentation of the media item.

As detailed above, the computing devices and systems described and/or illustrated herein broadly represent any type or form of computing device or system capable of executing computer-readable instructions, such as those contained within the modules described herein. In their most basic configuration, these computing device(s) may each include at least one memory device and at least one physical processor.

In some examples, the term "memory device" generally refers to any type or form of volatile or non-volatile storage device or medium capable of storing data and/or computer-readable instructions. In one example, a memory device may store, load, and/or maintain one or more of the modules described herein. Examples of memory devices include, without limitation, Random Access Memory (RAM), Read Only Memory (ROM), flash memory, Hard Disk Drives (HDDs), Solid-State Drives (SSDs), optical disk drives, caches, variations or combinations of one or more of the same, or any other suitable storage memory.

In some examples, the term "physical processor" generally refers to any type or form of hardware-implemented processing unit capable of interpreting and/or executing computer-readable instructions. In one example, a physical processor may access and/or modify one or more modules stored in the above-described memory device. Examples of physical processors include, without limitation, microprocessors, microcontrollers, Central Processing Units (CPUs), Field-Programmable Gate Arrays (FPGAs) that implement softcore processors, Application-Specific Integrated Circuits (ASICs), portions of one or more of the same, variations or combinations of one or more of the same, or any other suitable physical processor.

Although illustrated as separate elements, the modules described and/or illustrated herein may represent portions of a single module or application. In addition, in certain embodiments one or more of these modules may represent one or more software applications or programs that, when executed by a computing device, may cause the computing device to perform one or more tasks. For example, one or more of the modules described and/or illustrated herein may represent modules stored and configured to run on one or more of the computing devices or systems described and/or illustrated herein. One or more of these modules may also represent all or portions of one or more special-purpose computers configured to perform one or more tasks.

In addition, one or more of the modules described herein may transform data, physical devices, and/or representations of physical devices from one form to another. For example, one or more of the modules recited herein may receive data to be transformed, transform the data, output a result of the transformation to create personalized media content, use the result of the transformation to provide the personalized media content to an electronic device, and store the result of the transformation to provide feedback regarding the personalized media content. Additionally or alternatively, one or more of the modules recited herein may transform a processor, volatile memory, non-volatile memory, and/or any other portion of a physical computing device from one form to another by executing on the computing device, storing data on the computing device, and/or otherwise interacting with the computing device.

In some embodiments, the term "computer-readable medium" generally refers to any form of device, carrier, or medium capable of storing or carrying computer-readable instructions. Examples of computer-readable media include, without limitation, transmission-type media, such as carrier waves, and non-transitory-type media, such as magnetic-storage media (e.g., hard disk drives, tape drives, and floppy disks), optical-storage media (e.g., Compact Disks (CDs), Digital Video Disks (DVDs), and BLU-RAY disks), electronic-storage media (e.g., solid-state drives and flash media), and other distribution systems.

The process parameters and sequence of the steps described and/or illustrated herein are given by way of example only and can be varied as desired. For example, while the steps illustrated and/or described herein may be shown or discussed in a particular order, these steps do not necessarily need to be performed in the order illustrated or discussed. The various exemplary methods described and/or illustrated herein may also omit one or more of the steps described or illustrated herein or include additional steps in addition to those disclosed.

The preceding description has been provided to enable others skilled in the art to best utilize various aspects of the exemplary embodiments disclosed herein. This exemplary description is not intended to be exhaustive or to be limited to any precise form disclosed. Many modifications and variations are possible without departing from the spirit and scope of the present disclosure. The embodiments disclosed herein should be considered in all respects illustrative and not restrictive. Reference should be made to the appended claims and their equivalents in determining the scope of the present disclosure.

Unless otherwise noted, the terms "connected to" and "coupled to" (and their derivatives), as used in the specification and claims, are to be construed as permitting both direct and indirect (i.e., via other elements or components) connection. In addition, the terms "a" or "an," as used in the specification and claims, are to be construed as meaning "at least one of." Finally, for ease of use, the terms "including" and "having" (and their derivatives), as used in the specification and claims, are interchangeable with and have the same meaning as the word "comprising."

What is claimed is:

1. A computer-implemented method comprising:

accessing at least one video media item that includes a plurality of video media item segments that are encoded into a single data structure in a specified order;

accessing at least one music media item that is to be implemented in conjunction with the video media item;

analyzing the music media item to identify one or more musical properties associated with the music media item, including determining where one or more musical beats occur within the music media item; and

generating a cadence template configured to align the identified beats of the music media item with specified positions within the video media item, wherein the cadence template ensures that the specified positions in the video media item align with at least one beat of the music media item.

2. The computer-implemented method of claim **1**, wherein the specified positions within the video media item comprise changes between video media item segments, and wherein the generated cadence template ensures that at least one change between video media item segments occurs on the at least one beat of the music media item.

3. The computer-implemented method of claim **2**, wherein the video media item is played back according to a custom playgraph, and wherein the custom playgraph arranges a subset of the video media item segments into a video trailer.

4. The computer-implemented method of claim **1**, wherein the specified positions within the video media item comprise changes between scenes within a video media item segment, and wherein the generated cadence template ensures that at least one change between scenes in the video media item segment occurs on the at least one beat of the music media item.

5. The computer-implemented method of claim **1**, wherein the cadence template governs an amount of time each video media item segment is shown within the encoded ordering.

6. The computer-implemented method of claim **1**, wherein one or more video media item segments are edited to align with the at least one beat of the music media item according to the cadence template.

7. The computer-implemented method of claim **1**, wherein the cadence template is generated for a virtual asset, the virtual asset comprising an indication of selected video media item segments and playback order for those selected video media item segments.

8. The computer-implemented method of claim **1**, wherein the cadence template comprises a pattern that aligns the beats of the music media item with edits between video media item segments.

9. The computer-implemented method of claim **1**, wherein the music media item is played back simultaneously and in synch with the video media item segments.

10. The computer-implemented method of claim **1**, wherein at least some of the video media item segments are played back in a different order from the order in which the video media item segments were initially encoded, and wherein the cadence template ensures that one or more of the specified positions in the video media item occur on the at least one beat of the music media item.

11. A system comprising:

at least one physical processor; and

physical memory comprising computer-executable instructions that, when executed by the physical processor, cause the physical processor to:

access at least one video media item that includes a plurality of video media item segments that are encoded into a single data structure in a specified order;

access at least one music media item that is to be implemented in conjunction with the video media item;

analyze the music media item to identify one or more musical properties associated with the music media item, including determining where one or more musical beats occur within the music media item; and

generate a cadence template configured to align the identified beats of the music media item with specified positions within the video media item, wherein the cadence template ensures that the specified positions in the video media item align with at least one beat of the music media item.

12. The system of claim **11**, wherein the plurality of video media item segments is arranged into a plurality of video clips according to a custom playgraph.

13. The system of claim **12**, wherein the plurality of video clips is cut to a specified number of video frames, and wherein the cadence template ensures that the specified positions in the plurality of video clips occur on the at least one beat of the music media item.

14. The system of claim **13**, wherein the plurality of video clips is taken from a same movie or television show.

15. The system of claim **13**, wherein the plurality of video clips is taken from at least two different movies or television shows.

16. The system of claim **11**, wherein analyzing the music media item to identify one or more musical properties associated with the music media item includes identifying a number of beats per minute in the music media item.

17. The system of claim **16**, wherein the cadence template modifies a length of one or more video media item segments to ensure that the lengths match the music media item's number of beats per minute.

18. The system of claim **17**, wherein modifying the length of the video media item segments comprises at least one of: reordering the video media item segments, cutting the video media item segments, or extending the video media item segments.

19. The system of claim **11**, wherein the cadence template dictates a level of intensity associated with the video media item, and wherein the level of intensity controls a pace of cutting, a number of sound effects used, or a volume level used with the video media item.

20. A non-transitory computer-readable medium comprising one or more computer-executable instructions that, when executed by at least one processor of a computing device, cause the computing device to:

access at least one video media item that includes a plurality of video media item segments that are encoded into a single data structure in a specified order;

access at least one music media item that is to be implemented in conjunction with the video media item;

analyze the music media item to identify one or more musical properties associated with the music media item, including determining where one or more musical beats occur within the music media item; and

generate a cadence template configured to align the identified beats of the music media item with specified positions within the video media item, wherein the cadence template ensures that the specified positions in the video media item align with at least one beat of the music media item.

* * * * *